

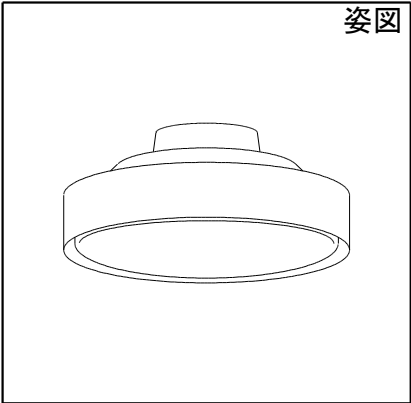


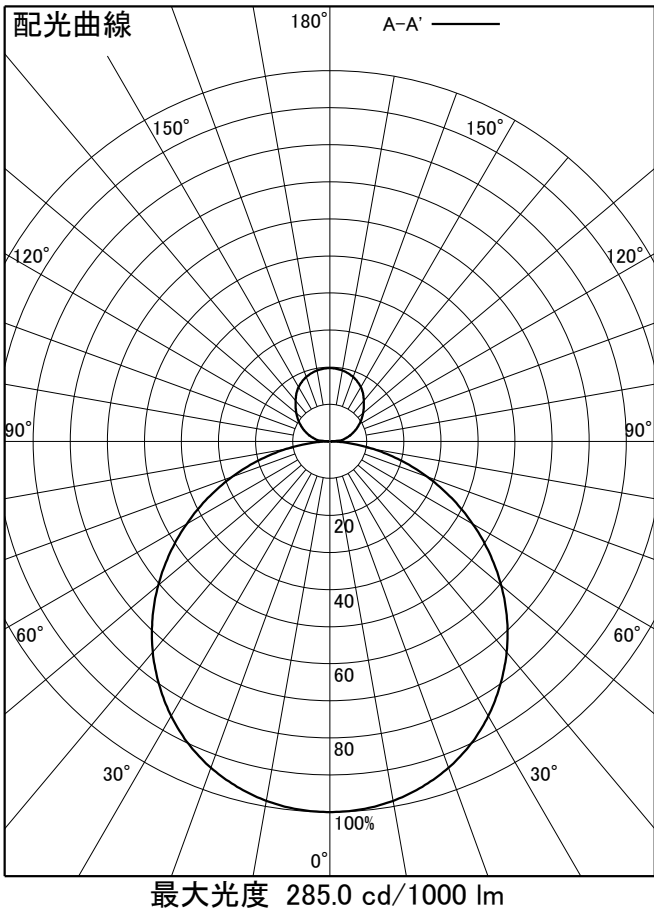

品 番	DCL-42382E_4700K
光 源	LED 40W 6500K~2700K
定格光束	4500 lm
照度角	65°
ビーム角	113°

器具効率	100.0 %
上方光束	17.4 %
下方光束	82.6 %
器具間隔 最大限 (取付高さH)	A 1.27H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0		
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数		照 明 率																																(× 0.01)			
0.6	60	55	46	44	37	36	31	31	57	53	44	42	36	35	31	30	52	49	41	40	34	34	30	29	48	46	39	38	33	32	28	28	28	25			
0.8	71	64	56	53	47	45	40	39	67	62	54	51	46	44	40	39	61	57	50	48	43	42	38	37	56	53	47	45	41	40	36	36	35	32			
1	79	71	65	60	55	53	49	47	75	68	62	58	54	51	47	46	68	63	58	55	51	49	45	44	62	58	54	52	48	46	43	42	41	38			
1.25	86	77	73	67	64	60	57	54	82	74	70	65	62	58	55	53	74	68	65	61	58	56	53	51	67	63	60	57	54	53	50	49	48	44			
1.5	92	81	80	72	71	66	64	60	87	78	76	70	68	64	62	59	79	72	70	66	64	61	58	56	71	67	65	62	59	57	55	54	53	49			
2	100	87	89	80	81	74	74	69	95	84	85	77	78	72	72	67	85	78	78	73	72	68	68	64	77	73	72	68	67	65	63	61	60	56			
2.5	105	90	96	84	88	79	82	75	99	87	91	82	85	77	79	73	89	81	83	77	78	73	74	70	81	76	76	72	72	69	69	67	65	61			
3	108	93	100	88	94	83	88	80	103	90	96	85	90	81	85	78	92	84	87	80	83	77	79	74	84	79	80	75	76	73	73	70	69	64			
4	113	96	106	92	101	88	96	85	107	93	101	89	96	86	92	83	96	87	92	84	88	81	85	79	87	81	84	79	81	77	78	75	73	69			
5	116	98	110	94	105	91	101	89	109	95	105	92	100	89	97	86	98	89	95	86	92	84	89	82	89	83	86	81	84	79	81	78	76	71			
7	119	100	115	98	111	96	108	94	113	97	109	95	106	93	103	91	101	91	99	90	96	88	94	87	91	86	89	84	88	83	86	82	80	75			
10	122	102	119	100	116	99	114	97	115	99	113	97	110	96	108	95	103	93	102	92	100	91	98	90	93	87	92	87	91	86	90	85	83	78			

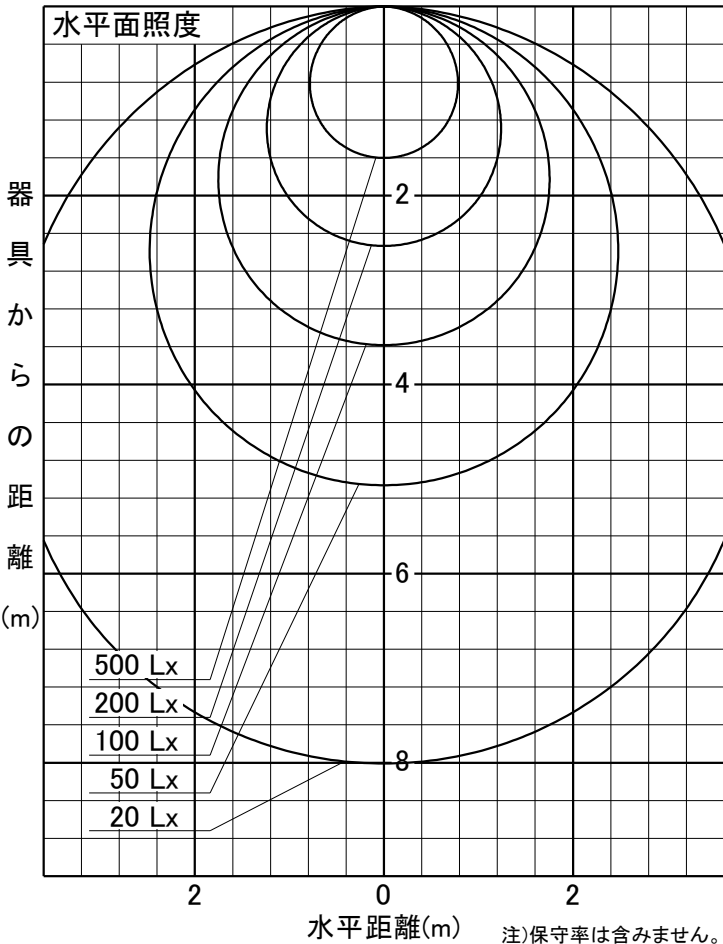

注)保守率は含みません。