


姿図

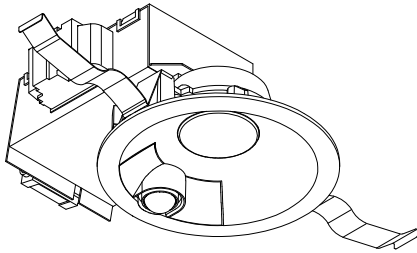

品番	DDL-4545AW
光源	LED 8W 3500K
定格光束	680 lm
1/2照度角	(A28° A' 29°) B-B' 58°
ビーム角	(A43° A' 40°) B-B' 88°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.11 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	55	48	43	55	48	43	53	47	42	52	46	42	40	
0.8	66	58	53	65	58	53	63	57	52	62	56	52	50	
1	74	67	62	73	66	61	71	65	61	70	64	60	58	
1.25	82	75	70	81	74	69	78	73	69	76	72	68	65	
1.5	87	81	76	86	80	75	83	78	74	81	77	73	70	
2	95	90	85	94	89	84	91	86	83	88	84	81	78	
2.5	100	95	91	98	94	90	95	91	88	92	89	86	83	
3	103	99	96	101	98	94	98	95	92	95	92	90	86	
4	107	104	101	105	102	99	101	99	96	97	95	94	89	
5	109	106	104	107	104	102	103	101	99	99	97	96	91	

