


姿図

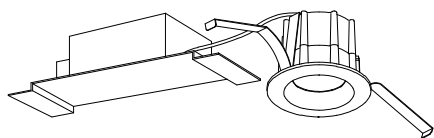

品 番	DDL-4829WW
光 源	LED 4.5W 5000K
定格光束	200.0 lm
1/2照度角	51°
ビーム角	64°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.96 H B 0.96 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		66	59	55	65	59	55	64	58	55	63	58	54	53
0.8		74	68	63	73	67	63	72	67	63	71	66	62	60
1		81	75	71	80	75	70	79	74	70	77	72	69	67
1.25		88	82	77	87	81	77	84	80	76	82	78	75	73
1.5		92	87	83	91	86	82	89	84	81	86	83	80	77
2		99	94	91	97	93	90	95	91	88	92	89	86	83
2.5		103	99	96	102	98	95	98	95	93	95	93	91	87
3		106	103	100	104	101	99	101	98	96	98	96	94	90
4		109	107	104	107	105	103	104	102	100	100	99	97	93
5		111	109	107	109	107	105	105	104	102	102	100	99	94

