




姿図

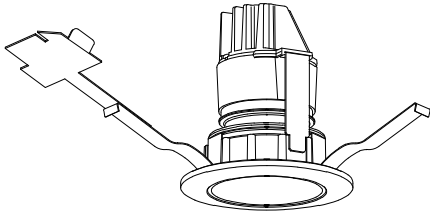


品番	LLD-7058LUW
光源	LED 14.5W 2700K
定格光束	690.0 lm
1/2照度角	33°
ビーム角	34°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.59 H B 0.59 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
		壁	50	30	10	50	30	10	50	30	10	50	30	10
床		20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6	84	79	76	83	79	76	82	78	76	81	78	76	74	
0.8	89	84	81	88	84	81	87	83	80	86	82	80	78	
1	94	90	87	93	89	86	92	88	86	90	87	85	83	
1.25	98	94	91	97	93	91	95	92	89	93	91	89	86	
1.5	101	97	94	100	97	94	98	95	93	96	93	91	89	
2	106	103	100	105	102	99	102	100	98	99	98	96	93	
2.5	109	107	105	108	105	103	105	103	101	102	100	99	96	
3	112	110	108	110	108	106	107	105	104	104	103	102	98	
4	114	112	111	112	111	109	108	107	106	105	104	104	99	
5	115	114	113	113	112	111	110	109	108	106	105	105	100	

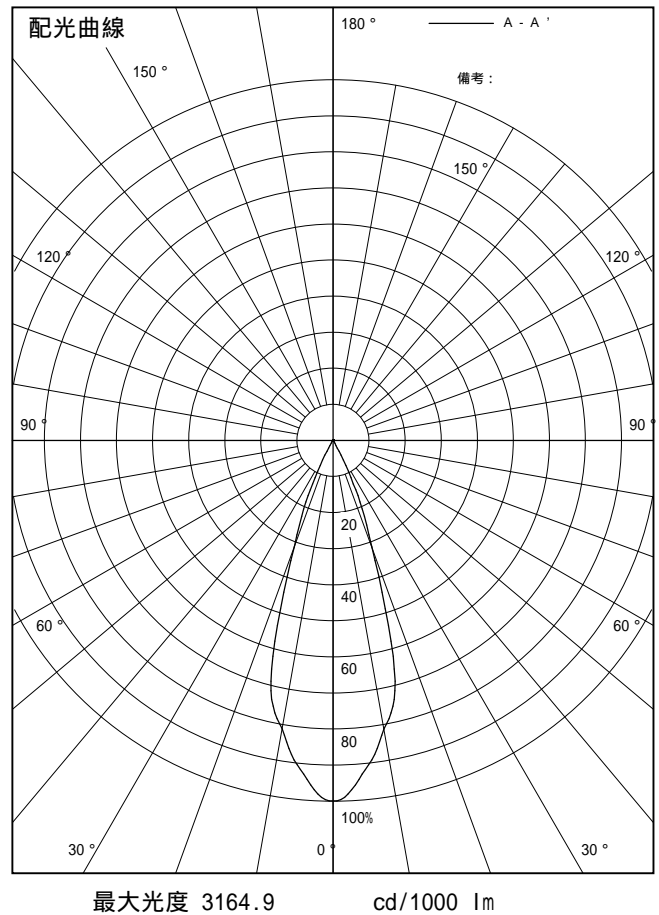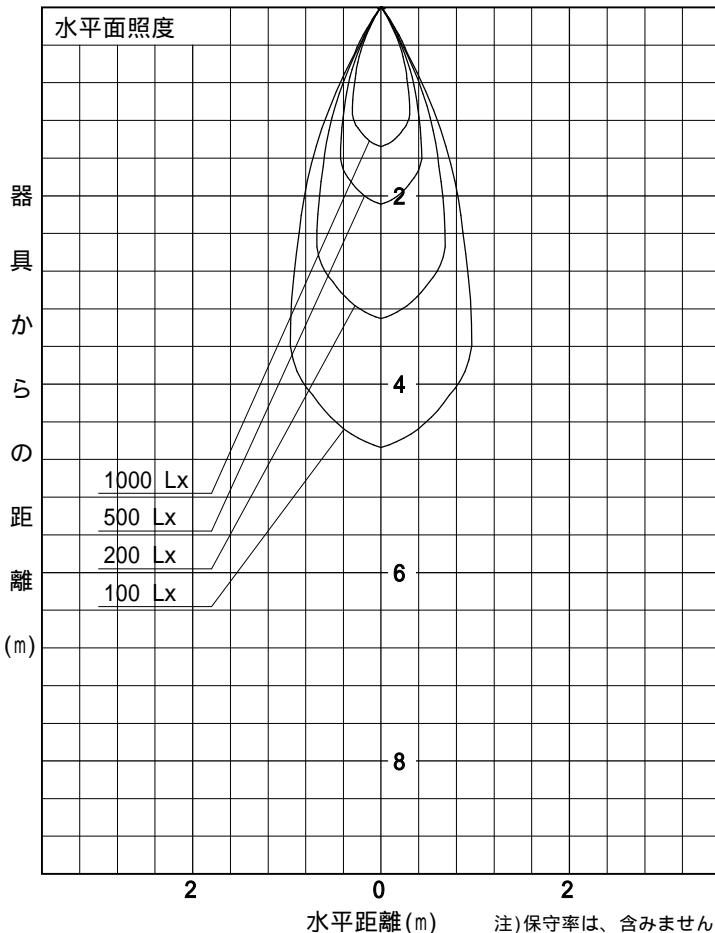

姿図

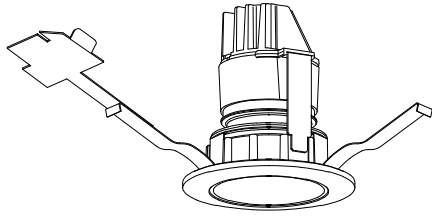

品番	LLD-7058LUW+省エネ電源
光源	LED 12.5W 2700K
定格光束	600.0 lm
1/2照度角	33°
ビーム角	34°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.59 H B 0.59 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	30	10	50	30	10	50	30	10	50	30	10	
床	20			20			20			20			0		
室指数	照 明 率 (× 0.01)														
0.6	84	79	76	83	79	76	82	78	76	81	78	76	74		
0.8	89	84	81	88	84	81	87	83	80	86	82	80	78		
1	94	90	87	93	89	86	92	88	86	90	87	85	83		
1.25	98	94	91	97	93	91	95	92	89	93	91	89	86		
1.5	101	97	94	100	97	94	98	95	93	96	93	91	89		
2	106	103	100	105	102	99	102	100	98	99	98	96	93		
2.5	109	107	105	108	105	103	105	103	101	102	100	99	96		
3	112	110	108	110	108	106	107	105	104	104	103	102	98		
4	114	112	111	112	111	109	108	107	106	105	104	104	99		
5	115	114	113	113	112	111	110	109	108	106	105	105	100		

