




姿図



品 番	DDL-5011YB
光 源	LED 5.6W 2700K
定格光束	360.0 lm
1/2照度角	62°
ビーム角	92°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.21 H B 1.21 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		55	47	42	54	47	42	53	46	42	52	46	42	40
0.8		65	58	52	64	57	52	63	56	52	61	56	51	49
1		74	66	61	73	66	61	71	65	60	69	64	59	57
1.25		81	74	69	80	74	69	78	72	68	76	71	67	64
1.5		87	80	75	85	79	75	83	78	74	80	76	72	70
2		95	89	85	93	88	84	90	86	82	87	84	81	77
2.5		99	95	91	98	93	90	94	91	88	91	88	86	82
3		103	99	95	101	97	94	97	94	91	94	92	89	85
4		107	103	100	104	101	99	101	98	96	97	95	93	89
5		109	106	103	107	104	102	103	100	98	99	97	96	91

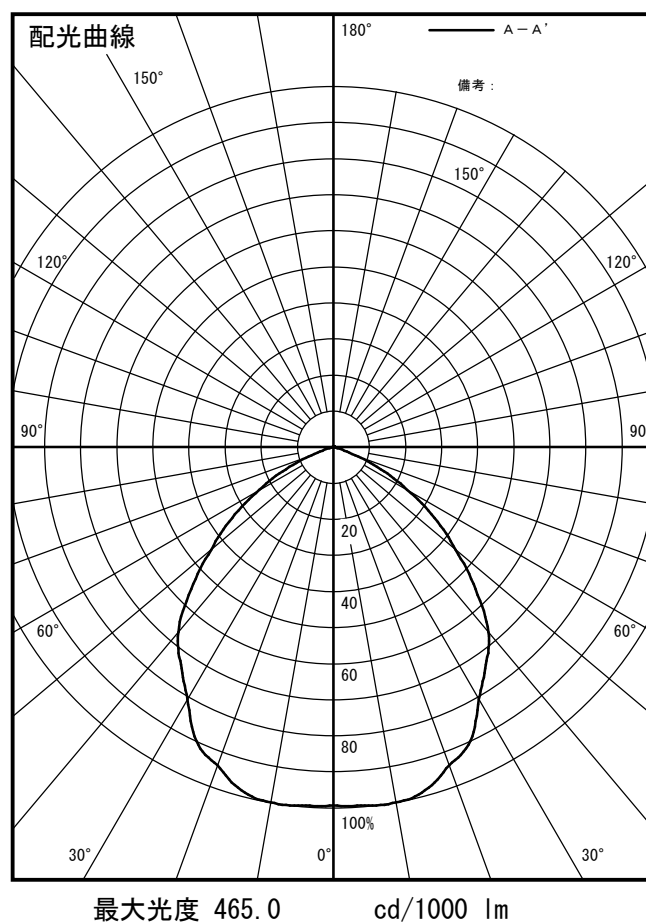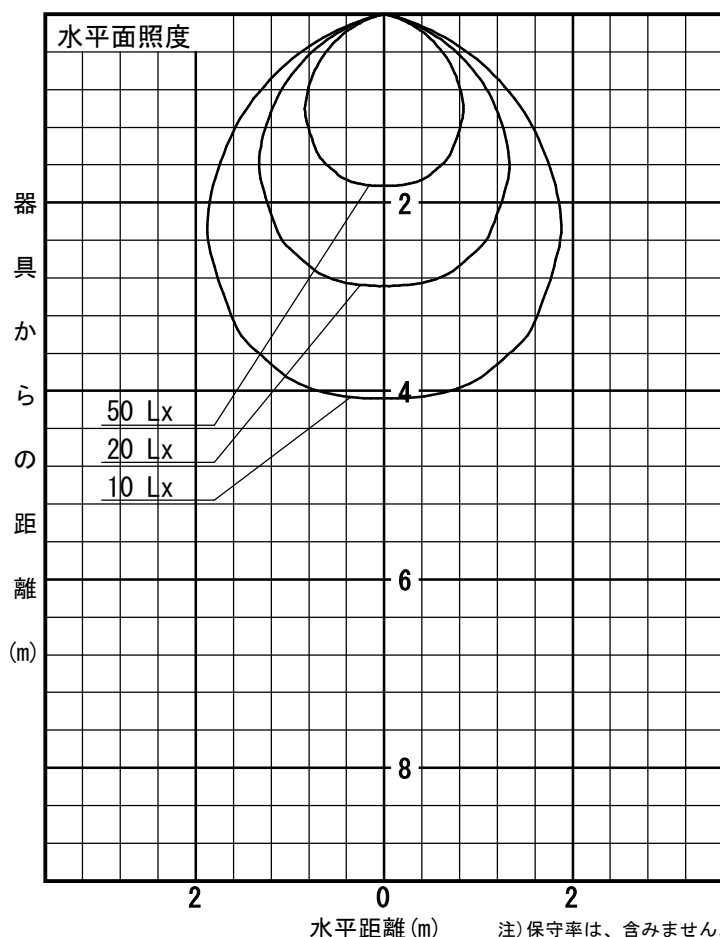

注) 保守率は、含みません。