




姿図

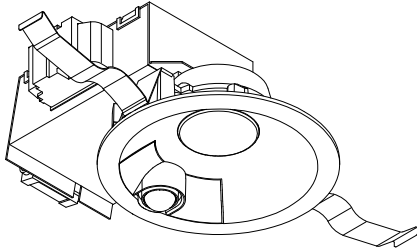

品番	DDL-4496AW
光源	LED 7.7W 3500K
定格光束	540 lm
1/2照度角	(A28° A' 29° ) B-B' 58°
ビーム角	(A43° A' 40° ) B-B' 90°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.11 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井				70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床				20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	55	47	42	54	47	42	53	47	42	52	46	42	40	
0.8	65	58	52	65	57	52	63	57	52	62	56	52	49	
1	74	67	61	73	66	61	71	65	60	69	64	60	57	
1.25	82	75	69	80	74	69	78	73	68	76	71	67	65	
1.5	87	81	76	86	80	75	83	78	74	81	76	73	70	
2	95	89	85	93	88	84	90	86	82	88	84	81	78	
2.5	100	95	91	98	94	90	95	91	88	92	89	86	82	
3	103	99	95	101	97	94	98	94	92	94	92	90	86	
4	107	103	100	105	102	99	101	98	96	97	95	93	89	
5	109	106	103	107	104	102	103	101	99	99	97	96	91	

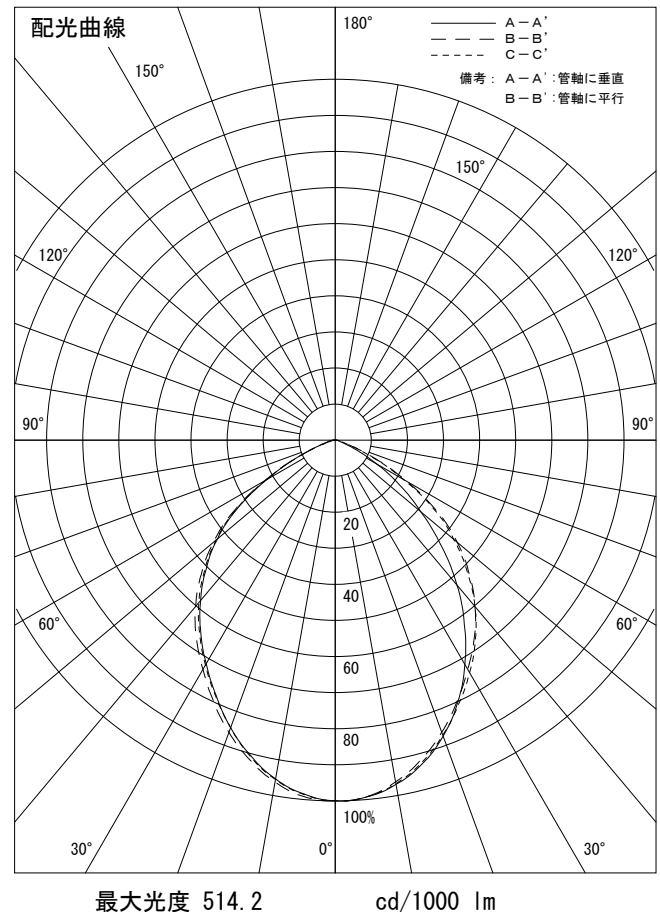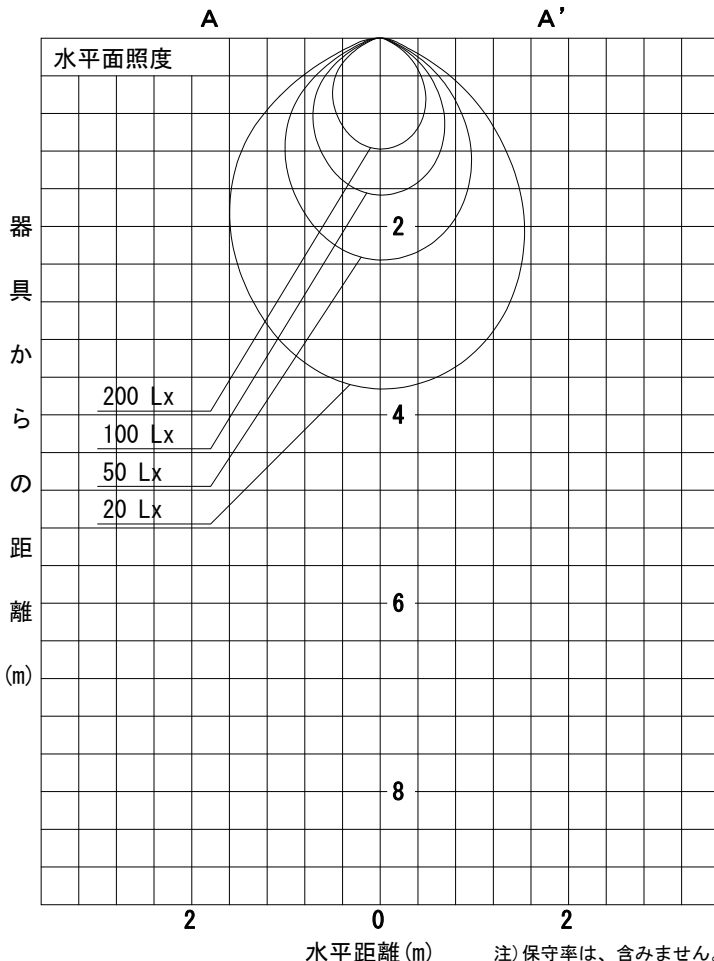

注) 保守率は、含みません。