


姿図

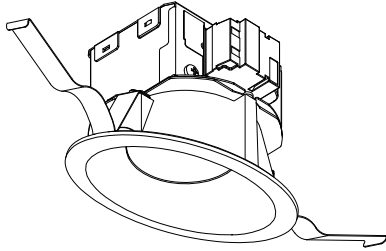

品 番	DDL-5121AW
光 源	LED 3500K 4.6W
定格光束	420.0 lm
1/2照度角	(A36° A' 25°) B-B' 62°
ビーム角	(A53° A' 33°) B-B' 88°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.20 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6	57	49	44	56	49	44	55	49	44	54	48	44	42	
0.8	67	60	54	66	59	54	65	58	54	63	58	53	51	
1	75	68	63	74	68	63	72	66	62	71	65	61	59	
1.25	83	76	71	81	75	70	79	74	69	77	72	69	66	
1.5	88	82	77	87	81	76	84	79	75	82	77	74	71	
2	96	90	86	94	89	85	91	87	83	88	85	82	79	
2.5	100	96	92	98	94	91	95	92	89	92	89	87	83	
3	103	99	96	102	98	95	98	95	92	95	92	90	86	
4	107	104	101	105	102	99	101	99	96	98	96	94	90	
5	109	106	104	107	105	102	103	101	99	99	98	96	91	

