




姿図

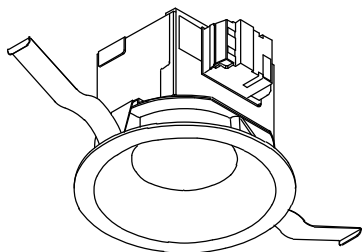

品 番	DDL-5002YB
光 源	LED 5.6W 2700K
定格光束	370.0 lm
1/2照度角	64°
ビーム角	92°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.26 H B 1.26 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		56	49	44	56	49	44	54	48	44	53	48	43	42
0.8		67	59	54	66	59	54	64	58	53	63	57	53	51
1		75	68	63	74	67	62	72	66	62	70	65	61	59
1.25		82	76	71	81	75	70	79	74	69	77	72	68	66
1.5		88	82	77	87	81	76	84	79	75	82	77	74	71
2		95	90	86	94	89	85	91	87	83	88	85	82	78
2.5		100	95	92	98	94	90	95	92	88	92	89	87	83
3		103	99	96	102	98	95	98	95	92	95	92	90	86
4		107	104	101	105	102	99	101	99	96	98	96	94	89
5		109	106	104	107	104	102	103	101	99	99	98	96	91

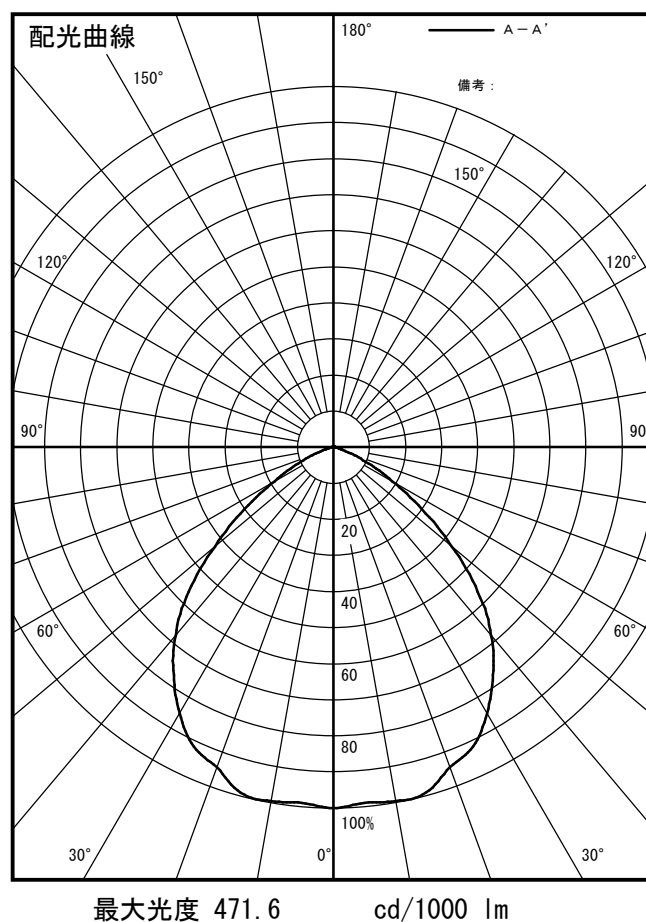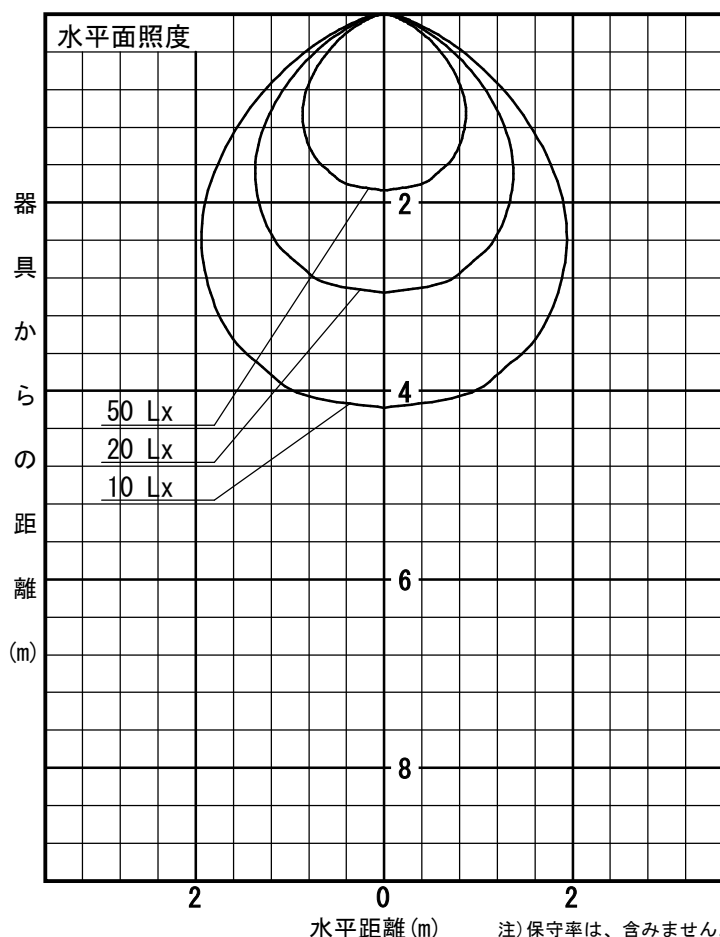

注) 保守率は、含みません。