


姿図

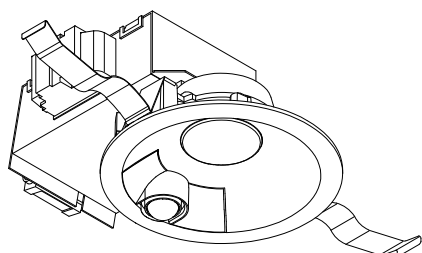

品 番	DDL-4546AW
光 源	LED 8W 3500K
定格光束	680 lm
1/2照度角	(A28° A' 29°) B-B' 58°
ビーム角	(A43° A' 40°) B-B' 88°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.11 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		55	48	43	55	48	43	53	47	42	52	46	42	40
0.8		66	58	53	65	58	53	63	57	52	62	56	52	50
1		74	67	62	73	66	61	71	65	61	70	64	60	58
1.25		82	75	70	81	74	69	78	73	69	76	72	68	65
1.5		87	81	76	86	80	75	83	78	74	81	77	73	70
2		95	90	85	94	89	84	91	86	83	88	84	81	78
2.5		100	95	91	98	94	90	95	91	88	92	89	86	83
3		103	99	96	101	98	94	98	95	92	95	92	90	86
4		107	104	101	105	102	99	101	99	96	97	95	94	89
5		109	106	104	107	104	102	103	101	99	99	97	96	91

