


姿図

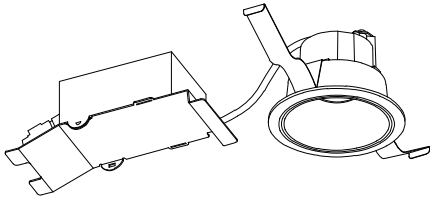

品 番	DDL-4911YW
光 源	LED 5.6W 2700K
定格光束	200.0 lm
1/2照度角	46°
ビーム角	54°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.84 H B 0.84 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
	室指数	照 明 率 (× 0.01)												
0.6	80	76	72	80	75	72	79	75	72	78	74	72	70	
0.8	86	81	78	86	81	78	84	80	77	83	79	77	75	
1	92	87	84	91	87	83	89	86	83	88	85	82	80	
1.25	96	92	89	95	91	88	93	90	87	91	89	86	84	
1.5	100	96	92	99	95	92	96	93	90	94	91	89	87	
2	105	101	99	103	100	98	101	98	96	98	96	94	91	
2.5	108	105	103	107	104	102	104	101	100	101	99	98	94	
3	111	108	106	109	107	105	106	104	102	103	101	100	96	
4	113	111	110	111	110	108	108	106	105	104	103	102	98	
5	115	113	112	113	111	110	109	108	107	105	104	104	99	

