


姿図

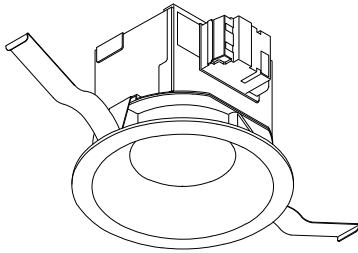

品番	DDL-5102AW
光源	LED 4.6W 3500K
定格光束	470.0 lm
1/2照度角	65°
ビーム角	92°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.28 H
	B 1.28 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	57	49	44	56	49	44	55	48	44	54	48	44	42	
0.8	67	60	54	66	59	54	65	58	54	63	58	53	51	
1	75	68	63	74	68	63	72	66	62	70	65	61	59	
1.25	83	76	71	81	75	70	79	74	70	77	72	69	66	
1.5	88	82	77	87	81	76	84	79	75	82	78	74	71	
2	96	90	86	94	89	85	91	87	83	88	85	82	79	
2.5	100	96	92	99	94	91	95	92	89	92	89	87	83	
3	104	100	96	102	98	95	98	95	92	95	92	90	86	
4	107	104	101	105	102	99	101	99	97	98	96	94	90	
5	109	107	104	107	105	102	103	101	99	99	98	96	92	

