




姿図

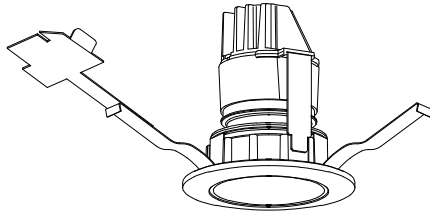


品番	LLD-7058LUB
光源	LED 14.5W 2700K
定格光束	750.0 lm
1/2照度角	51°
ビーム角	60°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.95 H B 0.95 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	84	80	77	84	80	77	83	79	77	82	79	77	75	
0.8	90	85	82	89	85	82	88	84	81	86	83	81	79	
1	95	90	87	94	90	87	92	89	86	91	88	86	84	
1.25	99	95	92	98	94	91	96	93	90	94	91	89	87	
1.5	102	98	95	100	97	94	98	95	93	96	94	92	89	
2	106	103	101	105	102	100	102	100	98	100	98	96	93	
2.5	110	107	105	108	106	104	105	103	102	102	101	99	96	
3	112	110	108	110	108	107	107	105	104	104	103	102	98	
4	114	113	111	112	111	110	109	108	107	105	105	104	100	
5	116	115	113	114	113	112	110	109	108	106	106	105	101	

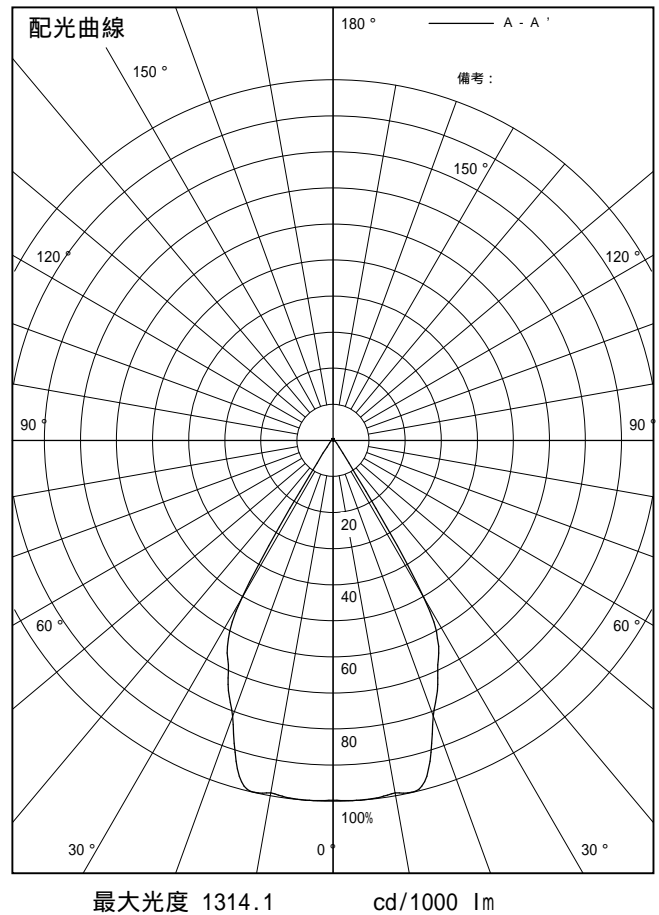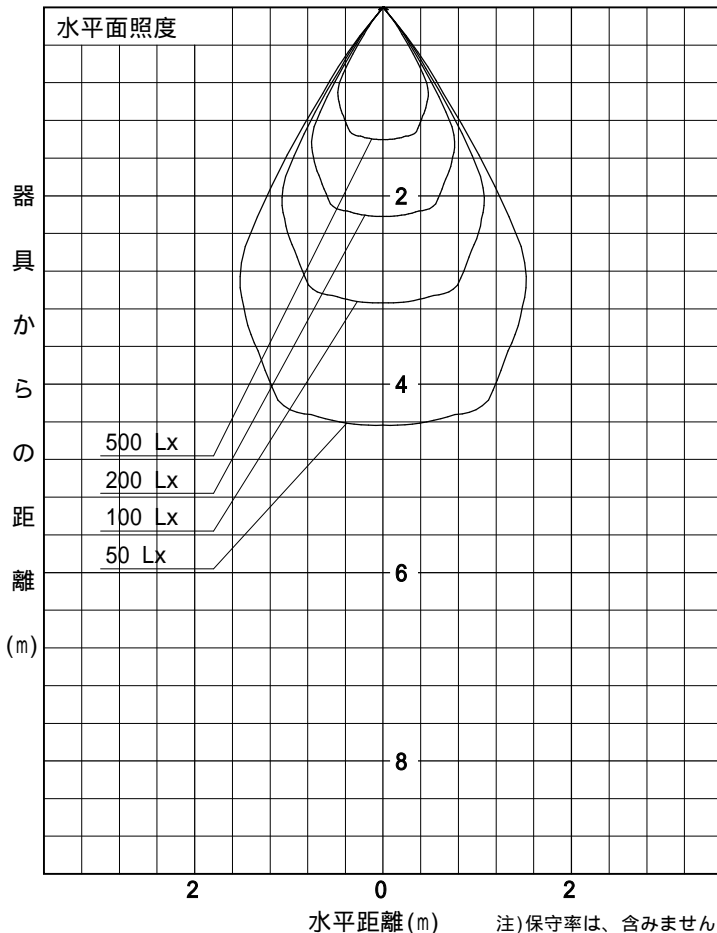

姿図

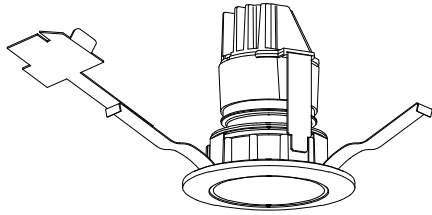

品番	LLD-7058LUB+省エネ電源
光源	LED 12.5W 2700K
定格光束	650.0 lm
1/2照度角	51°
ビーム角	60°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.95 H
	B 0.95 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
床	20			20			20			20			0		
室指数	照 明 率 (× 0.01)														
0.6	84	80	77	84	80	77	83	79	77	82	79	77	75		
0.8	90	85	82	89	85	82	88	84	81	86	83	81	79		
1	95	90	87	94	90	87	92	89	86	91	88	86	84		
1.25	99	95	92	98	94	91	96	93	90	94	91	89	87		
1.5	102	98	95	100	97	94	98	95	93	96	94	92	89		
2	106	103	101	105	102	100	102	100	98	100	98	96	93		
2.5	110	107	105	108	106	104	105	103	102	102	101	99	96		
3	112	110	108	110	108	107	107	105	104	104	103	102	98		
4	114	113	111	112	111	110	109	108	107	105	105	104	100		
5	116	115	113	114	113	112	110	109	108	106	106	105	101		

