


姿図

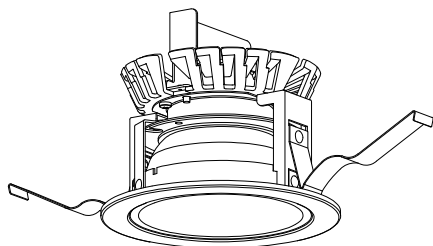

品 番	LZD-92282YW
光 源	LED 15W 3000K
定格光束	1140.0 lm
1/2照度角	55°
ビーム角	64°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.05 H B 1.05 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		80	75	72	79	75	72	79	75	72	78	74	71	70
0.8		86	81	78	85	81	78	84	80	77	83	79	77	75
1		92	87	84	91	87	83	89	86	83	88	85	82	80
1.25		96	92	89	95	91	88	93	90	87	91	89	86	84
1.5		100	96	93	99	95	92	96	93	91	94	91	89	87
2		105	102	99	103	100	98	101	98	96	98	96	94	91
2.5		108	106	103	107	104	102	104	102	100	101	99	98	94
3		111	108	106	109	107	105	106	104	103	103	101	100	96
4		113	111	110	111	110	108	108	106	105	104	103	102	98
5		115	113	112	113	111	110	109	108	107	105	104	104	99

