


姿図

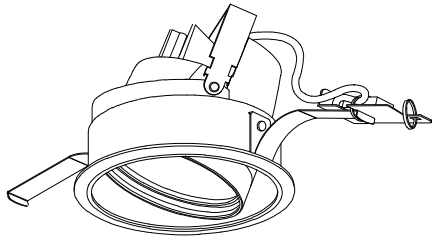

品番	LZD-92548AW
光源	LED 14W 3500K
定格光束	1250 lm
1/2照度角	12°
ビーム角	12°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.21 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	80	75	72	80	75	72	79	74	71	78	74	71	70	
0.8	86	81	78	86	81	77	84	80	77	83	79	76	75	
1	92	87	84	91	87	83	90	86	83	88	85	82	80	
1.25	97	92	89	96	92	88	94	90	87	92	89	86	84	
1.5	100	96	93	99	95	92	97	93	91	94	92	89	87	
2	106	102	99	104	101	98	101	99	96	99	97	95	92	
2.5	109	106	104	107	105	103	104	102	100	101	100	98	95	
3	112	109	107	110	108	106	107	105	103	103	102	101	97	
4	114	112	111	112	111	109	109	107	106	105	104	103	99	
5	116	114	113	114	112	111	110	109	108	106	105	105	100	

