


姿図

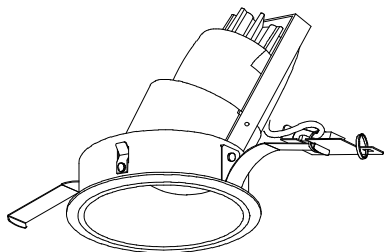

品 番	LZD-92800YBV
光 源	LED 15W Q+3000K
定格光束	520 lm
1/2照度角	33°
ビーム角	38°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.59 H
保 守 率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		84	80	77	84	80	77	83	79	77	82	79	76	75
0.8		89	85	82	89	84	81	87	84	81	86	83	81	79
1		94	90	87	94	90	87	92	89	86	90	88	85	83
1.25		98	94	91	97	94	91	95	92	90	94	91	89	87
1.5		102	98	95	100	97	94	98	95	93	96	94	92	89
2		106	103	101	105	102	100	102	100	98	100	98	96	93
2.5		109	107	105	108	106	104	105	103	101	102	101	99	96
3		112	110	108	110	108	107	107	105	104	104	103	102	98
4		114	113	111	112	111	110	109	108	107	105	104	104	100
5		116	114	113	114	113	112	110	109	108	106	106	105	101

