


姿図

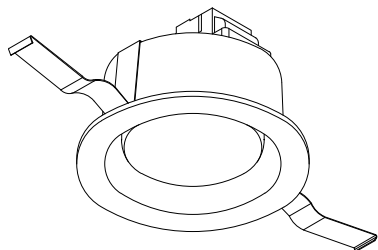

品番	DDL-5440WWG
光源	LDF7N-H-GX53/D/700/B50K
定格光束	790 lm
1/2照度角	62°
ビーム角	100°

器具効率	90.1 %
上方光束	0.0 %
下方光束	90.1 %
器具間隔 最大限 (取付高さH)	A 1.21 H
	B 1.21 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
床	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
室指数	照 明 率 ( × 0.01 )														
0.6	44	37	32	44	37	32	43	36	32	42	36	32	30		
0.8	54	46	41	53	46	40	51	45	40	50	44	40	38		
1	61	54	48	60	53	48	58	52	47	57	51	47	45		
1.25	68	61	55	67	60	55	65	59	54	63	58	54	51		
1.5	73	67	61	72	66	61	70	64	60	67	63	59	56		
2	81	75	70	79	74	70	77	72	68	74	70	67	64		
2.5	86	81	76	84	80	75	81	77	74	78	75	72	69		
3	89	85	81	88	84	80	84	81	78	81	79	76	72		
4	94	90	87	92	88	85	88	85	83	85	83	81	77		
5	96	93	90	94	91	89	91	88	86	87	85	84	79		

