


姿図

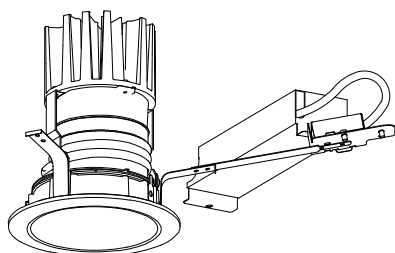

品 番	LLD-7061YUM4+LZA-90435
光 源	LED 39W 3000K
定格光束	1650 lm
1/2照度角	A-A' 45° B-B' 20°
ビーム角	A-A' 50° B-B' 20°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さ H)	A 0.83 H B 0.35 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		83	79	76	83	79	76	82	78	76	81	78	75	74
0.8		89	84	81	88	84	81	87	83	80	86	82	80	78
1		94	90	86	93	89	86	92	88	85	90	87	85	83
1.25		98	94	91	97	93	90	95	92	89	93	91	88	86
1.5		101	98	94	100	97	94	98	95	92	96	93	91	89
2		106	103	100	105	102	99	102	100	98	100	98	96	93
2.5		110	107	105	108	106	104	105	103	101	102	101	99	96
3		112	110	108	110	108	107	107	105	104	104	103	102	98
4		114	113	111	112	111	110	109	108	107	105	105	104	100
5		116	115	113	114	113	112	110	109	108	106	106	105	101

A-A'

B-B'

