


姿図

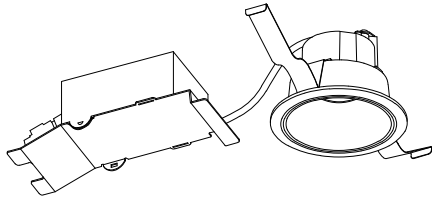

品番	LLD-7181ABWG
光源	LED 7.8W 3500K
定格光束	520 lm
1/2照度角	44°
ビーム角	53°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.80 H
	B 0.80 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			50			30			0		
	80	70	50	30	10	50	30	10	50	30	10	50	30	10	0
室指数	照明率 (×0.01)														
0.6	79	75	71	79	74	71	78	74	71	77	73	71	69		
0.8	86	81	77	85	80	77	84	80	77	82	79	76	74		
1	92	87	83	91	86	83	89	85	82	87	84	82	80		
1.25	96	92	88	95	91	88	93	90	87	91	88	86	84		
1.5	100	96	92	99	95	92	96	93	90	94	91	89	87		
2	105	102	99	104	100	98	101	98	96	98	96	94	91		
2.5	108	106	103	107	104	102	104	102	100	101	99	98	94		
3	111	109	107	109	107	105	106	104	103	103	101	100	97		
4	113	112	110	111	110	108	108	106	105	104	103	102	98		
5	115	113	112	113	112	110	109	108	107	105	105	104	99		

