


姿図

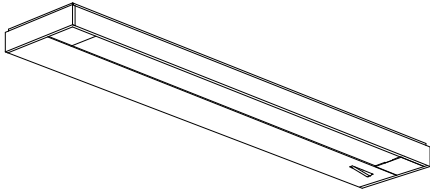

品 番	DCL-39744W
光 源	LED 11W 5000K
定格光束	1010 lm
1/2照度角	62°
ビーム角	98°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さ H)	A 1.20 H B 1.20 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	49	41	35	48	40	35	47	40	35	46	39	35	33	
0.8	59	50	44	58	50	44	56	49	44	55	48	43	41	
1	67	59	52	66	58	52	64	57	52	62	56	51	49	
1.25	75	67	61	74	66	60	71	65	59	69	63	59	56	
1.5	81	73	67	79	72	66	77	70	65	74	69	64	61	
2	89	82	77	88	81	76	84	79	75	81	77	73	70	
2.5	95	89	84	93	87	83	89	85	81	86	83	79	75	
3	99	93	89	97	92	88	93	89	86	90	86	84	80	
4	104	99	95	101	98	94	97	94	91	94	91	89	84	
5	107	103	100	104	101	98	100	97	95	96	94	92	87	

