


姿図

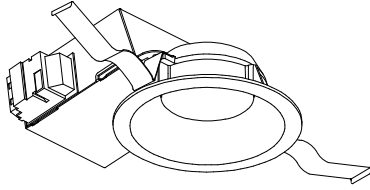

品番	DDL-4570FBG_2700K
光源	LED 9W 2700K~2000K
定格光束	730 lm
1/2照度角	62°
ビーム角	90°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.21 H B 1.21 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井		80			70			50			30			0
	壁	床	50	30	10	50	30	10	50	30	10	50	30	10	0
			20		20			20			20			0	
室指数	照 明 率 (× 0.01)														
0.6	57	50	45	56	49	45	55	49	44	54	48	44	42		
0.8	67	60	54	66	59	54	65	58	54	63	58	54	51		
1	75	68	63	74	68	63	72	67	62	71	65	61	59		
1.25	83	76	71	82	75	70	79	74	70	77	72	69	66		
1.5	88	82	77	87	81	76	84	79	75	82	78	74	71		
2	96	90	86	94	89	85	91	87	83	88	85	82	79		
2.5	100	96	92	99	94	91	95	92	89	92	89	87	83		
3	104	100	96	102	98	95	98	95	92	95	92	90	86		
4	107	104	101	105	102	99	101	99	97	98	96	94	90		
5	109	107	104	107	105	102	103	101	99	99	98	96	92		

