


姿図

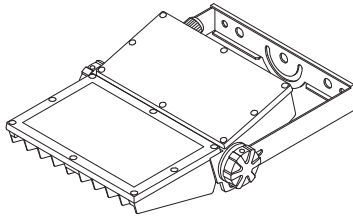

品番	LZW-92186WSE
光源	LED 73W 5000K
定格光束	9300.0 lm
1/2照度角	(A33° A' 30°) B-B' 66°
ビーム角	(A55° A' 42°) B-B' 108°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.30 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		51	44	38	51	43	38	50	43	38	48	42	38	36
0.8		62	54	49	61	54	48	60	53	48	58	52	48	45
1		71	63	57	70	63	57	68	61	57	66	60	56	54
1.25		79	72	66	78	71	65	75	69	65	73	68	64	61
1.5		85	78	72	83	77	72	81	75	71	78	74	70	67
2		93	87	82	91	86	81	88	84	80	85	82	78	75
2.5		98	93	88	96	91	87	93	89	86	90	87	84	80
3		102	97	93	100	96	92	96	93	90	93	90	88	84
4		106	102	99	104	100	97	100	97	95	96	94	92	88
5		108	105	102	106	103	101	102	100	97	98	96	95	90

