


姿図

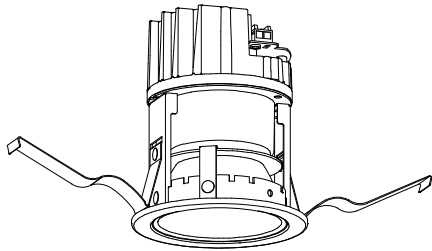

品番	LZD-93504NBB+LZA-91120E
光源	LED 16.7W 4000K
定格光束	1210 lm
1/2照度角	46°
ビーム角	52°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.85 H B 0.85 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
床	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
室指数	照 明 率 ( × 0.01 )														
0.6	81	77	73	81	76	73	80	76	73	79	75	73	72		
0.8	87	82	79	86	82	79	85	81	78	84	80	78	76		
1	93	88	85	92	88	84	90	87	84	89	86	83	81		
1.25	97	93	90	96	92	89	94	91	88	92	89	87	85		
1.5	100	96	93	99	96	93	97	94	91	95	92	90	88		
2	106	102	99	104	101	99	101	99	97	99	97	95	92		
2.5	109	106	104	107	105	103	104	102	100	101	100	98	95		
3	111	109	107	110	108	106	106	105	103	103	102	101	97		
4	114	112	110	112	110	109	108	107	106	105	104	103	99		
5	115	114	113	113	112	111	109	108	107	106	105	104	100		

