

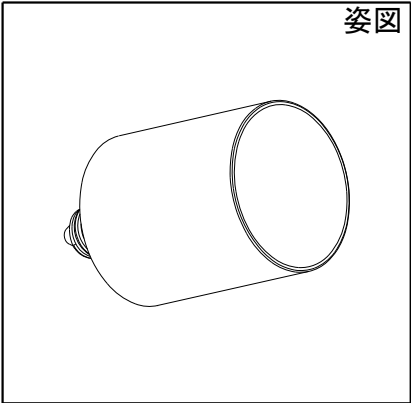


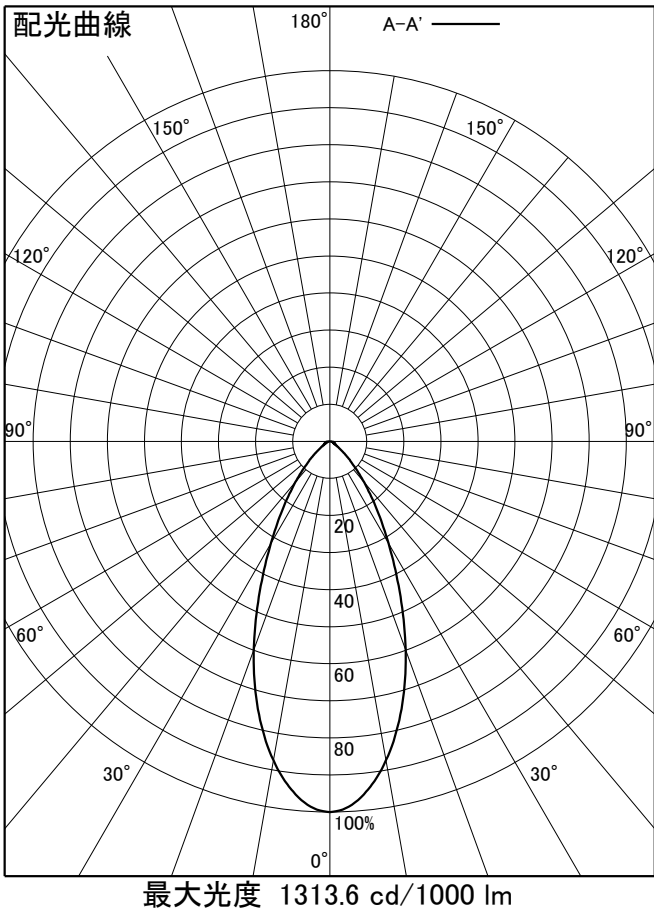

品 番	LZA-93790LSB
光 源	LDR4L-W-E11/D/S1146V
ランプ光束	425 lm
照度角	40°
ビーム角	46°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.72H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	86	79	75	71	69	67	65	64	84	78	74	71	68	67	64	63	81	76	73	70	68	66	64	63	79	75	72	70	67	66	64	63	63	62	
0.8	93	85	83	78	76	73	72	70	92	84	82	78	76	73	71	70	88	82	80	77	75	73	71	70	85	80	78	76	74	72	70	69	69	68	
1	100	90	90	84	84	79	79	76	98	89	89	83	83	79	78	76	94	87	86	82	81	78	77	75	90	85	84	81	80	78	76	75	75	74	
1.25	105	94	96	88	90	84	85	81	103	93	95	88	89	84	84	81	98	91	92	86	87	83	83	80	94	89	89	85	85	82	81	80	80	78	
1.5	109	96	101	92	95	88	90	85	107	95	99	91	93	87	89	85	101	93	96	90	91	87	87	84	97	91	92	88	89	86	85	83	83	82	
2	115	100	108	97	103	94	98	91	112	99	106	96	101	93	97	91	106	97	101	94	97	92	94	90	101	95	97	93	94	91	92	89	89	87	
2.5	119	102	113	100	108	97	104	95	115	101	110	99	106	97	102	95	109	99	105	97	102	95	99	94	104	97	101	96	98	94	96	93	92	91	
3	121	104	116	102	112	100	109	98	118	103	113	101	110	99	106	98	111	101	108	99	105	98	102	96	105	99	103	98	101	96	99	95	95	93	
4	124	106	120	104	117	102	114	101	120	104	117	103	114	102	111	100	113	102	111	101	108	100	106	99	107	100	105	99	103	99	102	98	97	95	
5	126	106	123	105	120	104	117	103	122	105	119	104	116	103	114	102	114	103	112	102	110	101	109	101	108	101	106	101	105	100	104	99	99	97	
7	128	108	126	107	124	107	122	106	124	107	122	106	120	106	119	105	116	105	115	104	114	104	113	103	110	103	109	102	108	102	107	102	101	99	
10	130	109	128	108	127	108	126	108	125	107	124	107	123	107	122	107	117	105	116	105	116	105	115	105	110	103	110	103	109	103	109	103	102	101	

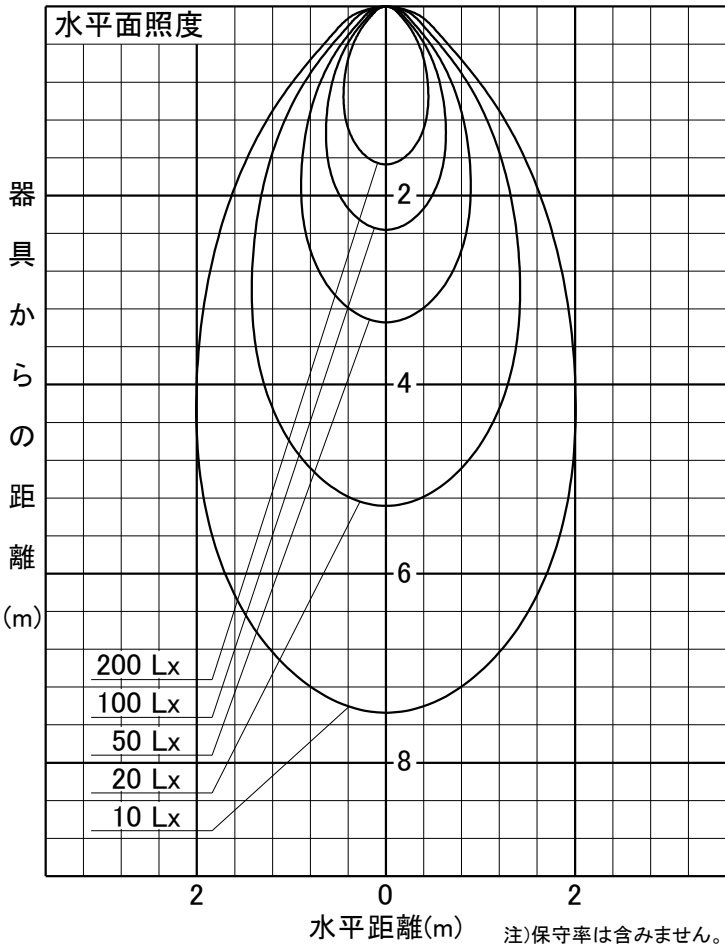

注)保守率は含みません。