



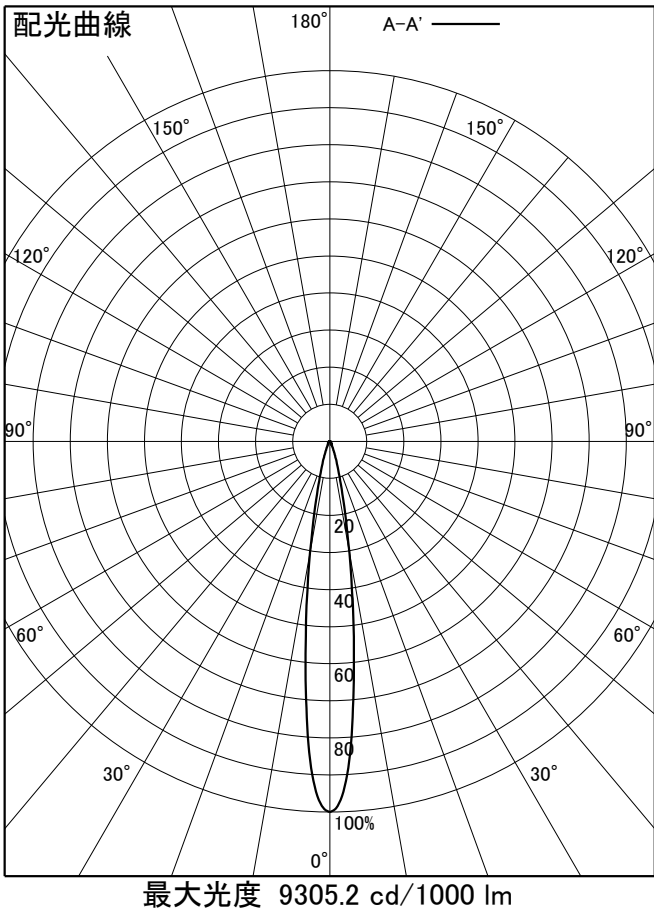

品 番	LZA-93794YSM
光 源	LDR4L-M-E11/D/S16V30
ランプ光束	350 lm
照度角	14°
ビーム角	15°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.25H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	93	86	84	80	78	76	74	73	92	85	83	79	78	75	74	73	89	84	82	79	77	75	73	73	87	82	80	78	76	75	73	73	72	71	
0.8	100	91	90	85	84	81	80	78	98	90	89	84	84	81	80	78	95	88	88	84	83	80	79	78	92	87	86	83	82	80	78	78	77	76	
1	106	95	97	90	91	86	87	84	104	94	96	89	90	86	86	83	100	92	93	88	89	85	85	83	96	91	91	87	87	85	84	83	82	81	
1.25	111	98	102	94	97	91	92	88	108	97	101	93	95	90	91	88	104	95	98	92	93	89	90	87	100	94	95	91	91	89	88	87	86	85	
1.5	114	100	107	97	101	94	97	91	111	99	105	96	100	93	96	91	106	98	101	95	97	92	94	90	102	96	98	93	94	91	92	90	89	88	
2	119	104	113	101	108	99	104	97	116	103	111	100	106	98	103	96	110	101	106	99	103	97	100	95	105	99	102	97	99	96	97	94	94	93	
2.5	123	106	117	104	113	102	110	100	119	105	115	103	111	101	108	100	113	103	110	101	107	100	104	99	108	101	105	100	103	99	101	98	97	96	
3	125	107	121	106	117	104	114	103	121	106	118	105	114	103	112	102	115	104	112	103	110	102	108	101	109	103	107	102	105	101	104	100	99	98	
4	127	108	124	107	121	106	119	105	124	107	121	106	118	106	116	105	117	105	114	105	113	104	111	103	110	104	109	103	108	102	106	102	101	100	
5	129	109	126	108	124	108	122	107	125	108	123	107	121	107	119	106	118	106	116	106	114	105	113	105	111	104	110	104	109	104	108	103	102	101	
7	131	110	130	110	128	110	127	110	127	109	126	109	124	109	123	109	119	107	118	107	117	107	117	107	112	106	112	106	111	105	111	105	105	103	
10	133	111	132	111	131	111	130	111	128	110	127	110	127	110	126	110	120	108	120	108	119	108	119	108	113	106	113	106	112	106	112	106	105	104	

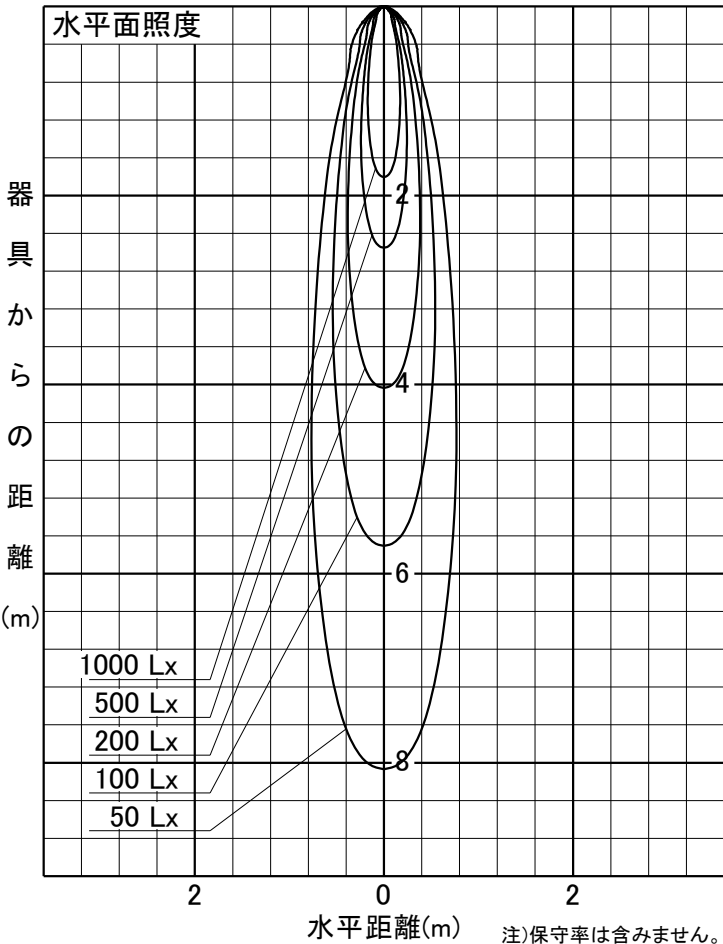

注)保守率は含みません。