

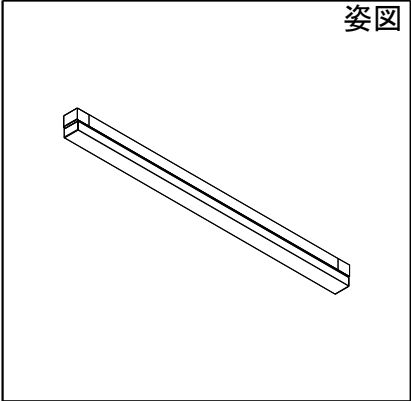


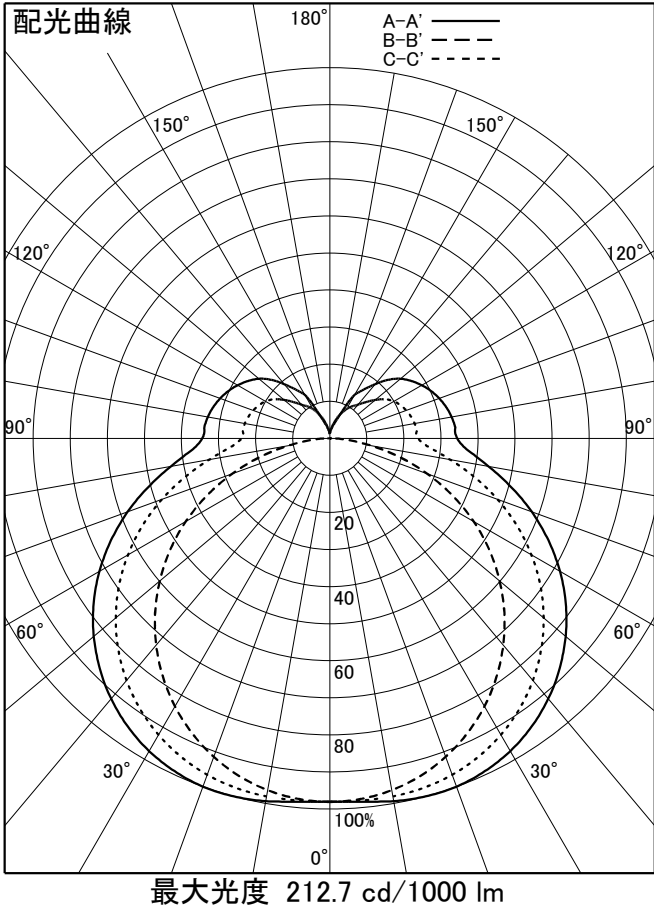

品 番	LZY-93512LTW
光 源	LED 41W 2800K
定格光束	5640 lm
照度角	A-A' 73° B-B' 65°
ビーム角	A-A' 152° B-B' 115°

器具効率	100.0 %
上方光束	19.4 %
下方光束	80.6 %
器具間隔 最大限 (取付高さH)	A 1.47H B 1.27H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	56	52	41	39	32	31	26	26	53	50	40	38	31	31	26	25	48	45	37	35	29	29	24	24	43	41	34	33	28	27	23	23	22	20	
0.8	67	60	51	48	42	40	35	34	63	58	49	46	40	39	34	33	56	52	45	43	38	36	32	31	51	48	41	40	35	34	30	30	29	26	
1	74	67	60	55	50	47	42	41	70	64	57	53	48	46	41	40	63	58	52	49	44	43	39	38	56	53	48	46	41	40	36	36	35	31	
1.25	82	73	68	62	58	54	50	48	77	70	65	60	56	52	49	47	69	63	59	55	51	49	46	44	61	58	54	51	47	46	43	42	41	37	
1.5	87	77	74	67	64	60	57	54	82	74	71	65	62	58	55	52	73	67	64	60	57	54	51	49	65	62	58	56	52	51	48	47	45	41	
2	95	83	84	75	75	68	67	62	90	80	80	72	71	66	65	61	80	73	72	67	65	62	60	57	71	67	65	62	60	58	56	54	52	48	
2.5	101	87	90	80	82	74	75	68	95	83	86	77	78	71	72	67	84	77	77	71	71	67	66	63	75	71	70	66	65	62	61	59	57	53	
3	104	89	95	83	87	78	81	73	98	86	90	80	83	75	77	71	87	79	81	75	76	71	71	67	78	73	73	69	69	66	65	63	61	56	
4	109	93	101	88	95	83	89	79	103	89	96	85	90	81	85	77	91	83	86	79	82	75	78	72	81	76	77	73	74	71	71	68	66	61	
5	112	95	106	91	100	87	95	83	106	91	100	87	95	84	90	81	94	85	89	82	86	79	82	76	84	78	80	76	77	73	75	71	69	64	
7	116	98	111	94	107	91	102	89	109	94	105	91	101	89	97	86	97	88	94	85	91	83	88	81	87	81	84	79	82	78	80	76	73	68	
10	119	100	115	97	112	95	109	93	112	96	109	94	106	92	103	90	100	90	97	88	95	86	93	85	89	83	87	82	85	81	84	79	77	71	

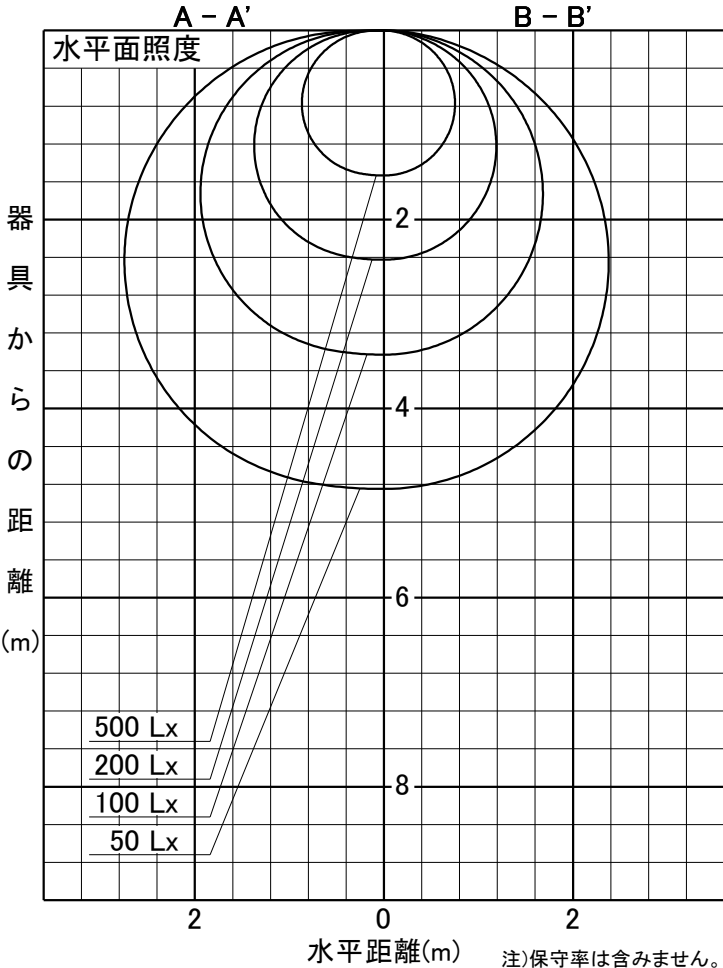

注)保守率は含みません。