


姿図



品 番	DDL-8772AW
光 源	LED 9.1W 3500K
定格光束	750.0 lm
1/2照度角	47°
ビーム角	58°

器具効率	100.0	%	反射率 (%)	天井	80			70			50			30			0
上方光束	0.0	%		壁	50	30	10	50	30	10	50	30	10	50	30	10	0
下方光束	100.0	%		床	20			20			20			20			0
			室指数	照 明 率 (× 0.01)													
			0.6	68	61	57	67	61	57	66	61	57	65	60	57	55	
器具間隔 最大限 (取付高さH)	A	0.87 H	0.8	75	69	65	75	69	64	73	68	64	72	67	64	62	
	B	0.87 H	1	82	76	72	81	75	71	79	74	71	78	73	70	68	
			1.25	88	82	78	87	81	77	85	80	76	83	79	75	73	
保 守 率			1.5	92	87	83	91	86	82	89	84	81	86	83	80	77	
			2	99	94	90	97	93	89	94	91	88	92	89	86	83	
			2.5	103	99	96	101	98	95	98	95	93	95	93	91	87	
			3	106	103	100	104	101	98	101	98	96	98	96	94	90	
			4	109	107	104	107	105	103	104	102	100	100	98	97	93	
			5	111	109	107	109	107	105	105	104	102	102	100	99	95	

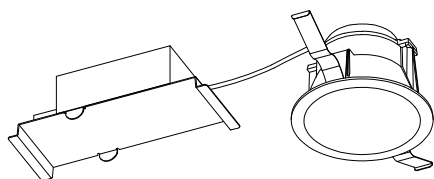