


姿図

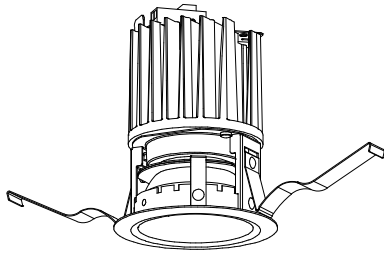

品 番	LZD-92904YWV
光 源	LED 15W Q+3000K
定格光束	940.0 lm
1/2照度角	53 °
ビーム角	64 °

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さ H)	A 0.99 H B 0.99 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		76	71	67	75	70	67	74	70	67	73	69	67	65
0.8		83	77	73	82	77	73	81	76	73	79	75	72	71
1		89	84	80	88	83	79	86	82	79	84	81	78	76
1.25		94	89	85	93	88	85	91	87	84	89	85	83	80
1.5		97	93	89	96	92	89	94	90	87	92	89	86	84
2		103	99	96	101	98	95	99	96	93	96	94	92	89
2.5		107	103	101	105	102	100	102	99	97	99	97	95	92
3		109	107	104	107	105	103	104	102	100	101	99	98	94
4		112	110	108	110	108	106	106	105	103	103	102	101	96
5		114	112	110	111	110	109	108	106	105	104	103	102	98

