


姿図

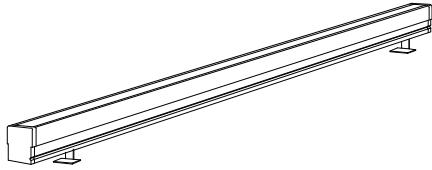

品番	LLY-7065NUN
光源	LED 37.5W 4000K
定格光束	4500.0 lm
1/2照度角	A-A' 25° B-B' 61°
ビーム角	A-A' 26° B-B' 84°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.44 H
	B 1.17 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			70			50			30			0		
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30
	床			20			20			20			20		
室指数	照 明 率 ( × 0.01 )														
0.6	66	59	55	65	59	55	64	59	55	63	58	55	53		
0.8	74	68	63	73	67	63	72	66	62	71	66	62	60		
1	81	75	70	80	74	70	78	73	69	77	72	69	67		
1.25	88	82	77	86	81	77	84	79	76	82	78	75	72		
1.5	92	87	82	91	86	82	88	84	80	86	82	79	77		
2	99	94	90	97	93	89	94	91	88	92	89	86	83		
2.5	103	99	96	101	98	95	98	95	92	95	93	91	87		
3	106	103	100	104	101	98	101	98	96	98	96	94	90		
4	109	107	104	107	105	103	104	102	100	100	99	97	93		
5	111	109	107	109	107	105	105	104	102	102	100	99	95		

A-A'

B-B'

