


姿図

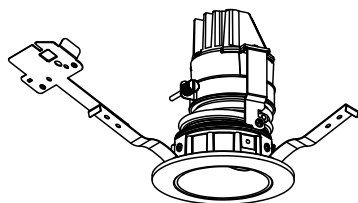

品 番	LLD-7060AUM
光 源	LED 13.7W 3500K
定格光束	495.0 lm
1/2照度角	16°
ビーム角	16°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.27 H B 0.27 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		85	80	77	84	80	77	83	80	77	82	79	77	75
0.8		90	86	82	90	85	82	88	84	82	87	84	81	80
1		96	91	88	95	91	88	93	90	87	92	89	86	84
1.25		100	96	92	99	95	92	97	94	91	95	92	90	88
1.5		103	99	96	102	98	95	100	96	94	97	95	93	90
2		108	105	102	107	104	101	104	101	99	101	99	98	94
2.5		111	109	106	110	107	105	107	105	103	104	102	101	97
3		114	112	110	112	110	108	109	107	106	106	104	103	100
4		116	115	113	114	113	111	111	109	108	107	106	105	101
5		118	116	115	116	115	114	112	111	110	108	107	107	102

