


姿図




品番	DEG-41013W
光源	LED 1.3W 5000K
定格光束	380.0 lm
保守率	0.92
備考	非常灯点灯時の照度(30分後)

非常灯配置表

器具取付高さ(m)	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6	3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5
単体配置 A1	4.3	4.4	4.5	4.5	4.6	4.6	4.7	4.7	4.7	4.7	4.6	4.5	4.4	4.3	4.2	4.1	4.0	3.9	3.8	3.7	3.7	3.6	3.5	3.3	3.2	2.2	-
直線配置 A2	9.3	9.7	10.0	10.4	10.6	10.9	11.1	11.4	11.7	11.9	12.1	12.3	12.5	12.6	12.8	12.9	12.9	12.9	12.9	13.0	12.9	12.8	12.8	12.8	12.6	11.6	10.6
四角配置 A4	7.5	7.7	8.0	8.2	8.5	8.7	9.0	9.2	9.4	9.7	9.9	10.1	10.4	10.6	10.8	11.0	11.2	11.3	11.5	11.7	11.9	12.0	12.2	12.3	12.4	11.6	10.6
壁からの距離(最大) AO	3.0	3.1	3.2	3.3	3.4	3.4	3.5	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.5	3.4	3.2	3.1	3.0	2.9	2.7	2.5	2.3	2.0	1.7	1.1	1.0

直射水平面照度  
ランプ光束1000lm

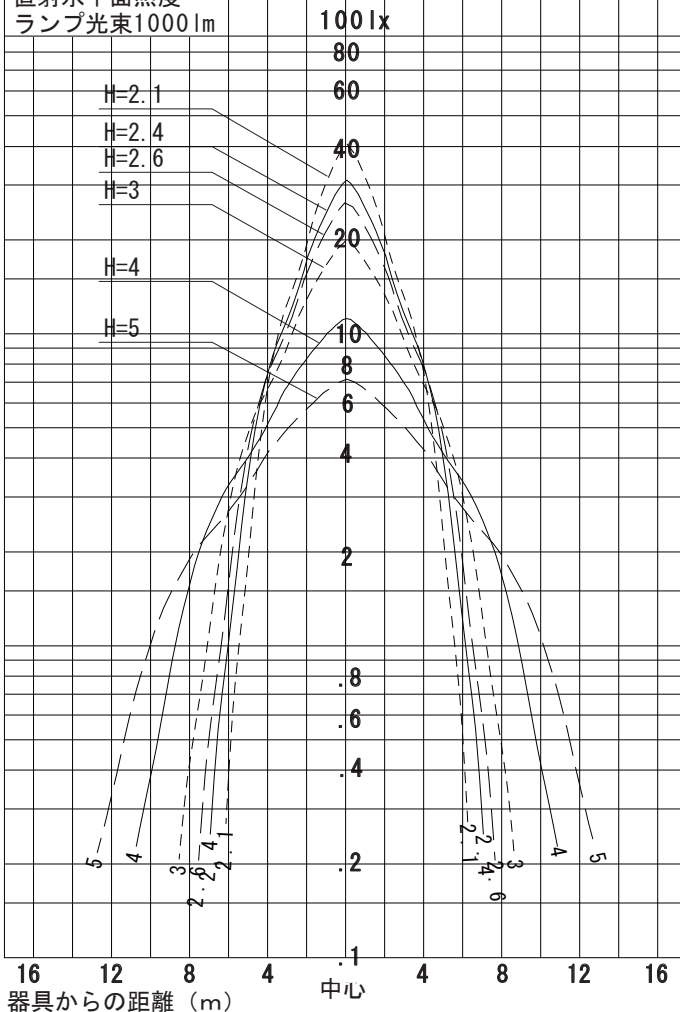

設計照度Eを得るための読取照度

E = 2.0	E = 1.0	E = 0.5
5.7	2.9	1.4

