


姿図

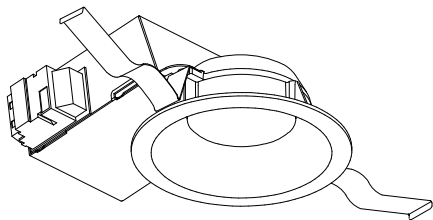

品番	DDL-4908FWG	
光源	LED 8W 2700K-3500K	
定格光束	700	lm
1/2照度角	62°	
ビーム角	90°	

器具効率	100.0 %	
上方光束	0.0 %	
下方光束	100.0 %	
器具間隔 最大限 (取付高さH)	A	1.20 H
	B	1.20 H
保 守 率	良	0.67
	中	0.63
	否	0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		56	48	43	55	48	43	54	47	43	53	47	43	41
0.8		66	59	53	65	58	53	64	57	53	62	56	52	50
1		74	67	62	73	66	61	71	65	61	70	64	60	58
1.25		82	75	70	81	74	69	78	73	68	76	71	68	65
1.5		87	81	76	86	80	75	83	78	74	81	77	73	70
2		95	90	85	93	88	84	90	86	83	88	84	81	78
2.5		100	95	91	98	94	90	95	91	88	92	89	86	82
3		103	99	95	101	97	94	98	95	92	94	92	90	86
4		107	103	100	105	102	99	101	98	96	97	95	93	89
5		109	106	104	107	104	102	103	101	99	99	97	96	91

