


姿図



品 番	DDL-4829YWE
光 源	LED 3.2W 2700K
定格光束	230 lm
1/2照度角	51°
ビーム角	66°

器具効率	100.0	%	反射率 (%)	天井	80			70			50			30			0
				壁	50	30	10	50	30	10	50	30	10	50	30	10	0
上方光束	0.0	%		床	20			20			20			20			0
下方光束	100.0	%	室指数	照 明 率 (× 0.01)													
器具間隔 最大限 (取付高さH)	A	0.96 H	0.6	63	56	52	62	56	51	61	55	51	60	55	51	49	
			0.8	72	65	60	71	65	60	69	64	60	68	63	59	57	
	B	0.96 H	1	79	73	68	78	72	68	76	71	67	75	70	66	64	
			1.25	86	80	75	85	79	75	83	78	74	81	76	73	70	
保 守 率	良 中 否	0.67 0.63 0.56	1.5	91	85	81	89	84	80	87	82	79	85	81	78	75	
			2	98	93	89	96	92	88	93	90	86	91	87	85	82	
			2.5	102	98	94	100	97	93	97	94	91	94	92	89	86	
			3	105	102	98	103	100	97	100	97	95	97	95	93	89	
			4	109	106	103	107	104	102	103	101	99	99	98	96	92	
			5	111	108	106	109	106	104	104	103	101	101	99	98	93	

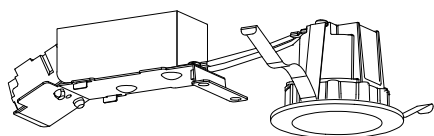