


姿図

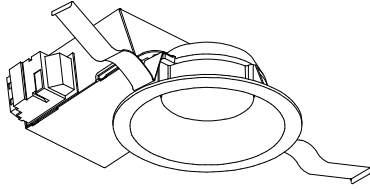

品番	DDL-4395FBG
光源	LED 5.8W 2700K-5000K
定格光束	360 lm
1/2照度角	62°
ビーム角	90°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.20 H B 1.20 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			床			室指数			照明率 (×0.01)			
	80	70	50	30	10	50	30	10	50	30	10	50	30	10	0	
	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	
0.6	56	48	43	55	48	43	54	48	43	53	47	43	41			
0.8	66	59	53	65	58	53	64	57	53	62	57	52	50			
1	74	67	62	73	67	61	71	65	61	70	64	60	58			
1.25	82	75	70	81	74	69	78	73	69	76	72	68	65			
1.5	87	81	76	86	80	75	83	78	74	81	77	73	70			
2	95	90	85	93	88	84	90	86	83	88	84	81	78			
2.5	100	95	91	98	94	90	95	91	88	92	89	86	82			
3	103	99	95	101	97	94	98	95	92	94	92	90	86			
4	107	103	100	105	102	99	101	98	96	97	95	93	89			
5	109	106	104	107	104	102	103	101	99	99	97	96	91			

