


姿図

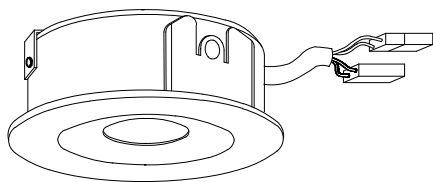

品 番	LZD-93116YBM
光 源	LED 4.2W 3000K
定格光束	315 lm
1/2照度角	20°
ビーム角	22°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.36 H B 0.36 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		80	75	71	79	74	71	78	74	71	77	73	71	69
0.8		86	81	77	85	80	77	84	79	76	82	79	76	74
1		91	87	83	91	86	83	89	85	82	87	84	81	79
1.25		96	92	88	95	91	88	93	89	87	91	88	86	83
1.5		100	95	92	98	94	91	96	93	90	94	91	89	86
2		105	101	98	103	100	97	101	98	96	98	96	94	91
2.5		109	106	103	107	104	102	104	102	100	101	99	98	94
3		111	109	106	109	107	105	106	104	103	103	101	100	96
4		114	112	110	112	110	108	108	107	105	105	104	103	98
5		115	114	112	113	112	111	109	108	107	106	105	104	100

