


姿図

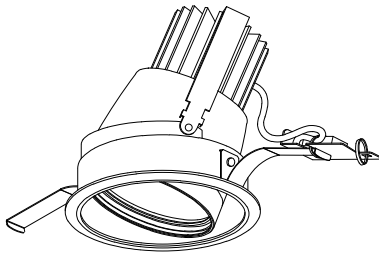

品番	LZD-93051YBM+LZA-93015
光源	LED 30W 3000K
定格光束	2620 lm
1/2照度角	18°
ビーム角	18°

器具効率	100.9 %
上方光束	0.0 %
下方光束	100.9 %
器具間隔 最大限 (取付高さH)	A 0.32 H
	B 0.32 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	80	75	72	79	75	71	78	74	71	77	74	71	69	
0.8	86	81	77	85	80	77	84	80	77	83	79	76	74	
1	92	87	83	91	86	83	89	85	82	88	84	82	80	
1.25	96	92	88	95	91	88	93	90	87	91	88	86	84	
1.5	100	96	92	99	95	92	96	93	90	94	91	89	86	
2	105	102	99	104	100	98	101	98	96	98	96	94	91	
2.5	109	106	103	107	104	102	104	102	100	101	99	98	94	
3	111	109	107	109	107	105	106	104	103	103	102	100	97	
4	114	112	110	112	110	109	108	107	106	105	104	103	98	
5	115	114	113	113	112	111	109	108	107	106	105	104	100	

