


姿図

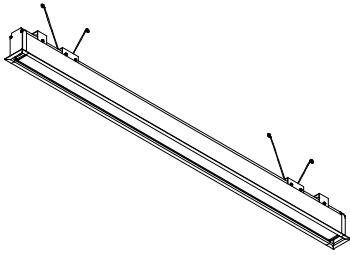

|        |                     |
|--------|---------------------|
| 品番     | LZY-93268WS         |
| 光源     | LED 41W 5000K       |
| 定格光束   | 3900 lm             |
| 1/2照度角 | A-A' 66° B-B' 63°   |
| ビーム角   | A-A' 112° B-B' 104° |

|                        |          |
|------------------------|----------|
| 器具効率                   | 100.0 %  |
| 上方光束                   | 0.0 %    |
| 下方光束                   | 100.0 %  |
| 器具間隔<br>最大限<br>(取付高さH) | A 1.30 H |
|                        | B 1.23 H |
| 保守率                    | 良 0.69   |
|                        | 中 0.67   |
|                        | 否 0.63   |

| 反射率 (%) | 天井  |     |    | 壁   |     |    | 床   |    |    | 照明率 (×0.01) |    |    | 室指数 |    |   |
|---------|-----|-----|----|-----|-----|----|-----|----|----|-------------|----|----|-----|----|---|
|         | 80  | 70  | 50 | 30  | 10  | 50 | 30  | 10 | 50 | 30          | 10 | 50 | 30  | 10 | 0 |
| 0.6     | 47  | 39  | 33 | 46  | 39  | 33 | 45  | 38 | 33 | 44          | 38 | 33 | 31  |    |   |
| 0.8     | 57  | 49  | 43 | 56  | 48  | 42 | 55  | 47 | 42 | 53          | 47 | 42 | 39  |    |   |
| 1       | 66  | 57  | 51 | 65  | 57  | 50 | 63  | 55 | 50 | 61          | 54 | 49 | 47  |    |   |
| 1.25    | 74  | 65  | 59 | 72  | 65  | 59 | 70  | 63 | 58 | 68          | 62 | 57 | 54  |    |   |
| 1.5     | 80  | 72  | 66 | 78  | 71  | 65 | 75  | 69 | 64 | 73          | 67 | 63 | 60  |    |   |
| 2       | 88  | 81  | 76 | 87  | 80  | 75 | 83  | 78 | 73 | 81          | 76 | 72 | 69  |    |   |
| 2.5     | 94  | 88  | 83 | 92  | 87  | 82 | 89  | 84 | 80 | 85          | 82 | 78 | 74  |    |   |
| 3       | 98  | 93  | 88 | 96  | 91  | 87 | 92  | 88 | 85 | 89          | 86 | 83 | 79  |    |   |
| 4       | 103 | 99  | 95 | 101 | 97  | 93 | 97  | 94 | 90 | 93          | 90 | 88 | 84  |    |   |
| 5       | 106 | 102 | 99 | 104 | 100 | 97 | 100 | 97 | 94 | 96          | 93 | 91 | 87  |    |   |

A-A'

B-B'

