


姿図

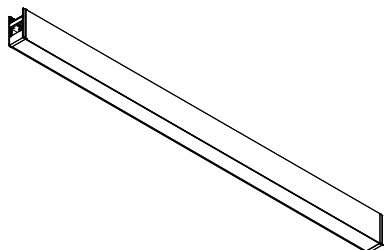

品 番	LZY-93252FS_5000K
光 源	LED 21W 5000K-2700K
定格光束	2180 lm
1/2照度角	上部配光 A-A' 84° B-B' 63°
ビーム角	上部配光 A-A' 138° B-B' 102°

器具効率	100.0 %
上方光束	100.0 %
下方光束	0.0 %
器具間隔 最大限 (取付高さ H)	A 1.81 H B 1.23 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		34	27	22	29	23	19	20	17	14	12	10	8	0
0.8		43	35	30	37	31	26	25	21	18	15	13	11	0
1		49	42	36	42	36	32	29	25	22	17	15	13	0
1.25		56	48	43	48	42	37	33	29	26	19	17	16	0
1.5		60	54	48	52	46	42	36	32	29	21	19	17	0
2		67	61	56	58	53	49	40	37	34	23	21	20	0
2.5		72	66	62	62	57	53	42	40	37	24	23	22	0
3		75	70	66	65	60	57	44	42	40	25	24	23	0
4		80	76	72	68	65	62	47	45	43	27	26	25	0
5		83	79	76	71	68	65	48	47	45	28	27	26	0

A-A'

B-B'

