


姿図

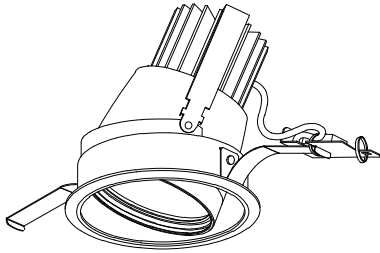

品番	LZD-91952AWE
光源	LED 39W 3500K
定格光束	4000 lm
1/2照度角	31°
ビーム角	31°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.55 H
	B 0.55 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	81	77	74	81	77	74	80	76	73	79	76	73	72	
0.8	87	83	79	87	82	79	85	81	78	84	81	78	76	
1	93	88	85	92	88	85	90	87	84	89	86	83	81	
1.25	97	93	90	96	92	89	94	91	88	92	90	87	85	
1.5	101	97	94	100	96	93	97	94	92	95	92	90	88	
2	106	103	100	104	101	99	102	99	97	99	97	95	92	
2.5	109	107	104	108	105	103	105	103	101	102	100	99	95	
3	112	110	108	110	108	106	107	105	104	104	102	101	97	
4	114	113	111	112	111	109	109	107	106	105	104	103	99	
5	116	114	113	114	113	111	110	109	108	106	105	105	100	

