


姿図





品番	LZY-93262WS
光源	LED 22W 5000K
定格光束	1940 lm
1/2照度角	A-A' 66° B-B' 63°
ビーム角	A-A' 112° B-B' 104°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.30 H
	B 1.23 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			床			照明率 (×0.01)			室指数		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
0.6	47	39	33	46	39	33	45	38	33	44	38	33	44	38	33
0.8	57	49	43	56	48	42	55	47	42	53	47	42	53	47	42
1	66	57	51	65	57	50	63	55	50	61	54	49	61	54	49
1.25	74	65	59	72	65	59	70	63	58	68	62	57	68	62	57
1.5	80	72	66	78	71	65	75	69	64	73	67	63	73	67	63
2	88	81	76	87	80	75	83	78	73	81	76	72	81	76	72
2.5	94	88	83	92	87	82	89	84	80	85	82	78	85	82	78
3	98	93	88	96	91	87	92	88	85	89	86	83	89	86	83
4	103	99	95	101	97	93	97	94	90	93	90	88	93	90	88
5	106	102	99	104	100	97	100	97	94	96	93	91	96	93	91

A-A'

B-B'

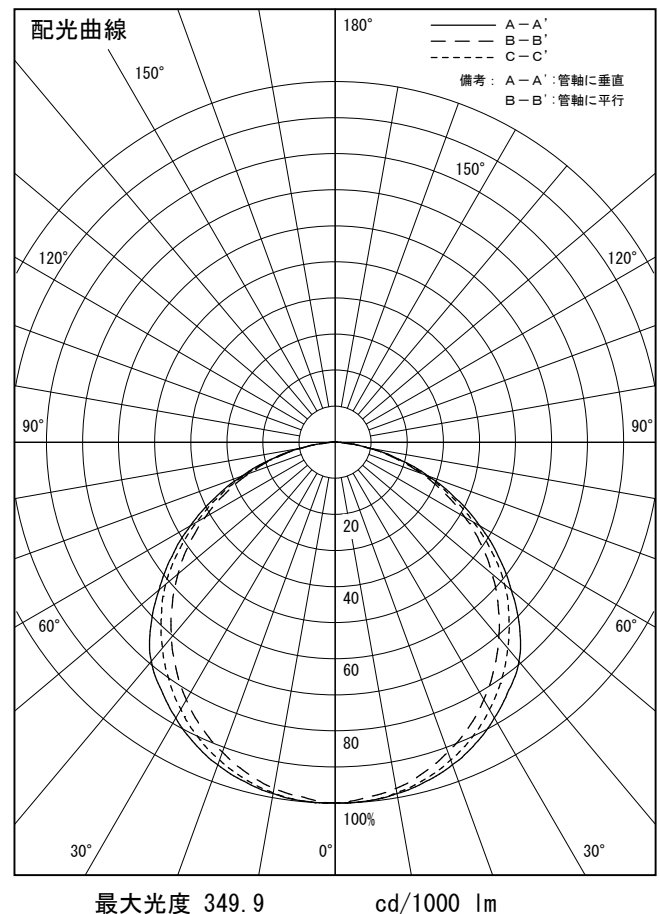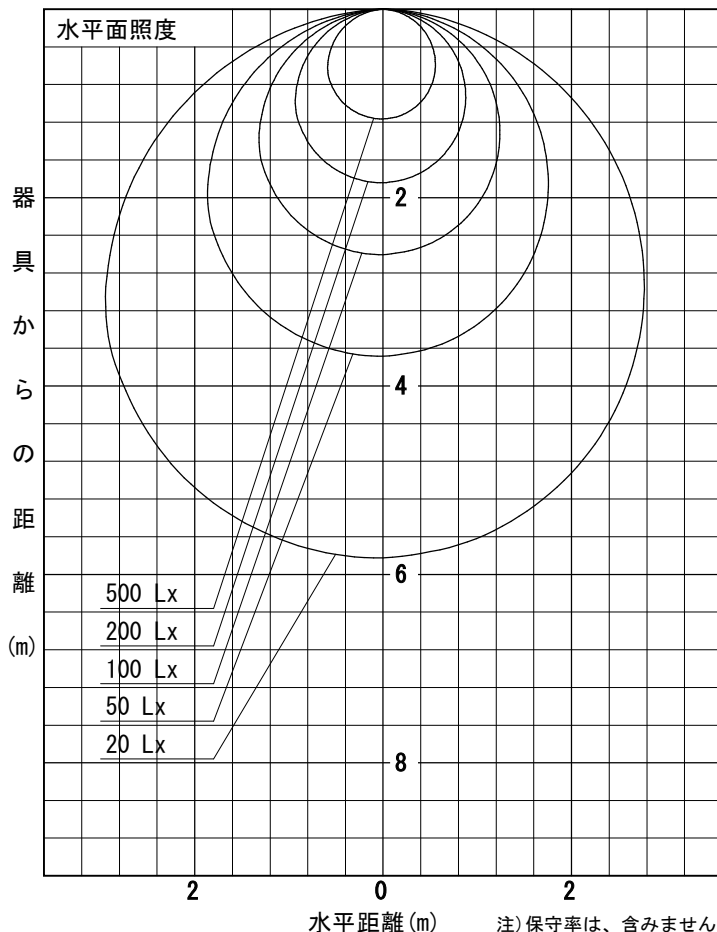

注)保守率は、含みません。