


姿図

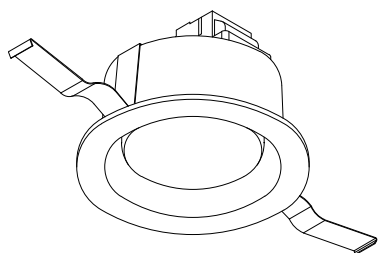

品 番	DDL-5437YB
光 源	LDF5L-H-GX53/500/B27K
定格光束	500.0 lm
1/2照度角	62°
ビーム角	96°

器具効率	86.0 %
上方光束	0.0 %
下方光束	86.0 %
器具間隔 最大限 (取付高さH)	A 1.20 H B 1.20 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		43	37	32	43	36	32	42	36	32	41	35	31	30
0.8		52	45	40	51	45	40	50	44	40	49	43	39	37
1		59	52	47	58	52	47	57	51	46	55	50	46	44
1.25		66	59	54	65	59	54	63	57	53	61	56	53	50
1.5		71	65	60	70	64	59	67	62	58	65	61	57	55
2		78	73	68	77	72	68	74	70	66	72	68	65	62
2.5		83	78	74	81	77	73	78	75	72	76	73	70	67
3		86	82	78	84	81	77	81	78	75	79	76	74	70
4		90	87	84	88	85	82	85	82	80	82	80	78	74
5		92	90	87	91	88	86	87	85	83	84	82	80	76

