


姿図

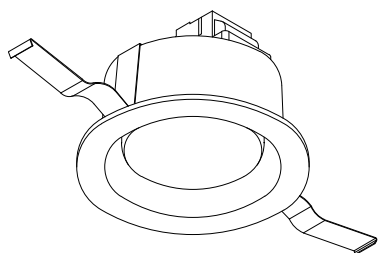

品 番	DDL-5439AB
光 源	LDF7WW-H-GX53/700/B35K
定格光束	760 lm
1/2照度角	61°
ビーム角	96°

器具効率	85.5 %
上方光束	0.0 %
下方光束	85.5 %
器具間隔 最大限 (取付高さH)	A 1.18 H B 1.18 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		43	36	32	42	36	31	41	36	31	40	35	31	29
0.8		52	45	40	51	44	40	50	44	39	48	43	39	37
1		59	52	47	58	51	47	56	50	46	55	50	46	43
1.25		66	59	54	64	58	53	62	57	53	60	56	52	50
1.5		71	64	59	69	63	59	67	62	58	65	61	57	55
2		78	72	68	76	71	67	74	69	66	71	68	65	62
2.5		82	78	74	81	76	73	78	74	71	75	72	69	66
3		86	81	78	84	80	77	81	78	75	78	75	73	70
4		90	86	83	88	85	82	84	82	80	81	79	77	74
5		92	89	86	90	87	85	87	84	82	83	82	80	76

