


姿図

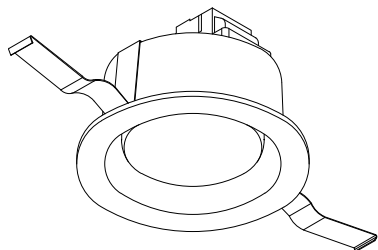

品番	DDL-5440ABG
光源	LDF7WW-H-GX53/D/700/B35K
定格光束	760 lm
1/2照度角	61°
ビーム角	96°

器具効率	85.5 %
上方光束	0.0 %
下方光束	85.5 %
器具間隔 最大限 (取付高さH)	A 1.18 H
	B 1.18 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	30	10	50	30	10	50	30	10	50	30	10	0
室指数	照明率 (×0.01)														
0.6	43	36	32	42	36	31	41	36	31	40	35	31	29		
0.8	52	45	40	51	44	40	50	44	39	48	43	39	37		
1	59	52	47	58	51	47	56	50	46	55	50	46	43		
1.25	66	59	54	64	58	53	62	57	53	60	56	52	50		
1.5	71	64	59	69	63	59	67	62	58	65	61	57	55		
2	78	72	68	76	71	67	74	69	66	71	68	65	62		
2.5	82	78	74	81	76	73	78	74	71	75	72	69	66		
3	86	81	78	84	80	77	81	78	75	78	75	73	70		
4	90	86	83	88	85	82	84	82	80	81	79	77	74		
5	92	89	86	90	87	85	87	84	82	83	82	80	76		

