


姿図

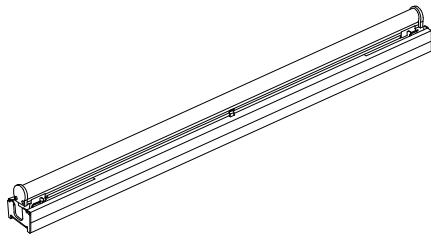



品番	DSY-3904AT
光源	LED 20W DECO-LINE L1200 3500K
定格光束	1970 lm
1/2照度角	A-A' 68° B-B' 63°
ビーム角	A-A' 148° B-B' 104°

器具効率	100.0 %
上方光束	14.7 %
下方光束	85.3 %
器具間隔 最大限 (取付高さH)	A 1.35 H B 1.23 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井	80			70			50			30			0
		壁	50	30	10	50	30	10	50	30	10	50	30	10
床		20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6	41	33	27	40	32	26	37	30	25	35	29	24	21	
0.8	50	41	35	49	40	34	46	38	33	43	36	31	28	
1	58	49	42	56	47	41	52	45	39	49	42	38	33	
1.25	65	56	49	63	55	48	59	52	46	55	49	44	39	
1.5	71	62	55	68	60	54	64	57	51	59	53	49	44	
2	79	71	65	76	69	63	71	65	60	66	61	57	51	
2.5	85	78	72	82	75	70	76	70	66	70	66	62	56	
3	89	83	77	86	80	75	80	75	70	74	70	66	59	
4	95	89	84	91	86	81	84	80	76	78	75	72	64	
5	98	93	89	94	90	86	87	84	80	81	78	75	67	

A-A'

B-B'

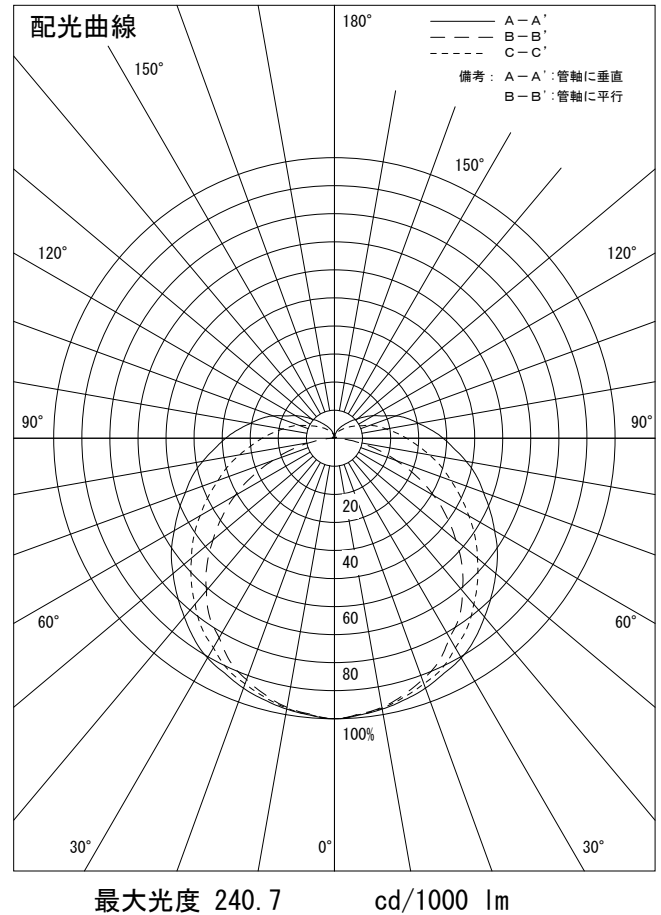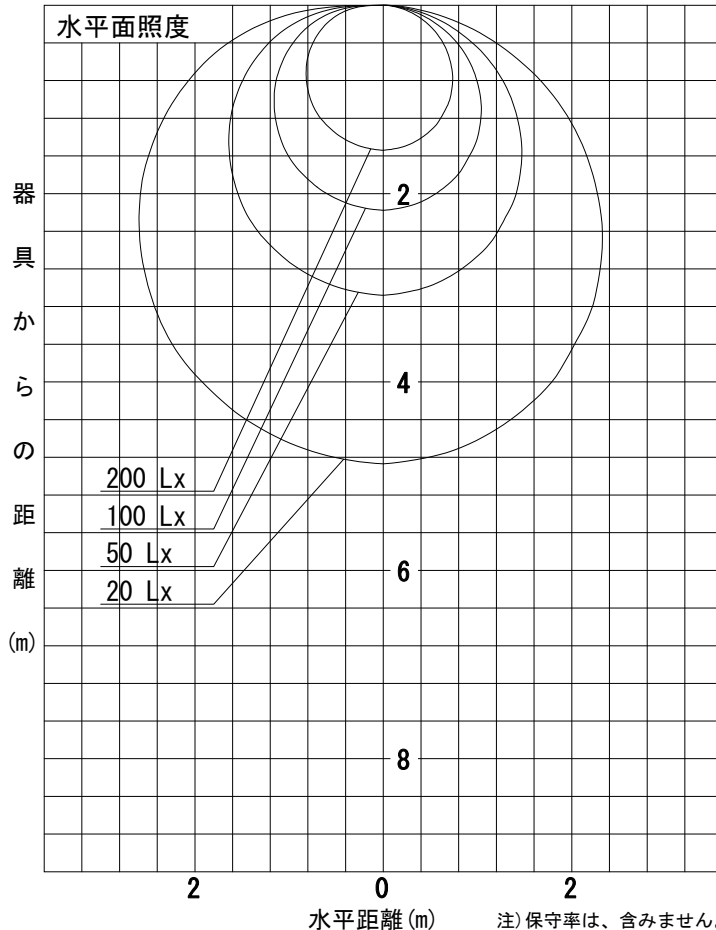

注) 保守率は、含みません。