


姿図

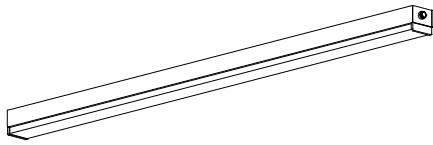

品番	DCL-40912W_天井取付
光源	LED 38W 5000K
定格光束	4250.0 lm
1/2照度角	A-A' 67° B-B' 64°
ビーム角	A-A' 124° B-B' 110°

器具効率	100.0 %
上方光束	9.0 %
下方光束	91.0 %
器具間隔 最大限 (取付高さH)	A 1.34 H
	B 1.26 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			床			室指数			照明率 (×0.01)		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
	20			20			20			20			20		
	0.6	44	35	30	43	35	29	41	34	29	39	32	28	25	
	0.8	53	45	38	52	44	38	49	42	37	47	41	36	33	
	1	61	53	46	60	52	45	57	49	44	54	48	43	39	
	1.25	69	60	54	67	59	53	64	57	51	60	54	50	46	
	1.5	75	67	60	73	65	59	69	62	57	65	60	55	51	
	2	84	76	70	81	74	69	77	71	66	72	68	64	59	
	2.5	89	83	77	87	81	75	82	77	72	77	73	69	64	
	3	93	87	82	91	85	81	85	81	77	81	77	74	68	
	4	99	94	89	96	91	87	90	86	83	85	82	79	73	
	5	102	98	94	99	95	91	93	90	87	87	85	83	76	

