


姿図

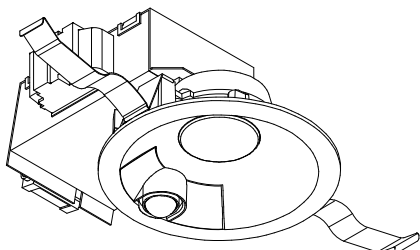

品 番	DDL-4546YB
光 源	LED 8W 2700K
定格光束	540 lm
1/2照度角	(A27° A' 29°) B-B' 57°
ビーム角	(A39° A' 39°) B-B' 84°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A *** H B 1.08 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		57	50	45	56	50	45	55	49	45	54	49	44	43
0.8		68	60	55	67	60	55	65	59	55	64	58	54	52
1		76	69	64	75	69	64	73	67	63	71	66	62	60
1.25		84	77	72	82	76	72	80	75	71	78	74	70	67
1.5		89	83	78	88	82	78	85	80	76	83	79	75	73
2		97	91	87	95	90	86	92	88	85	89	86	83	80
2.5		101	97	93	99	95	92	96	93	90	93	90	88	84
3		104	100	97	102	99	96	99	96	93	96	93	91	87
4		108	105	102	106	103	100	102	100	97	98	96	95	90
5		110	107	105	108	105	103	104	102	100	100	98	97	92

