


姿図

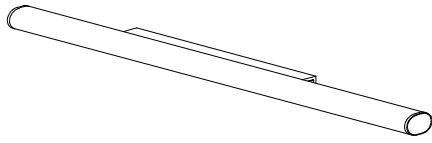



品番	DBK-40329WG_天井取付
光源	LED 37W 5000K
定格光束	4250.0 lm
1/2照度角	A-A' 71° B-B' 64°
ビーム角	A-A' 182° B-B' 108°

器具効率	100.0 %
上方光束	19.7 %
下方光束	80.3 %
器具間隔 最大限 (取付高さH)	A 1.43 H
	B 1.26 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井	80			70			50			30			0
		壁	50	30	10	50	30	10	50	30	10	50	30	10
	床	20			20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	39	31	25	38	30	24	35	28	23	32	26	22	18	
0.8	48	39	33	46	38	32	43	35	30	39	33	28	24	
1	56	46	40	53	45	38	49	42	36	45	39	34	29	
1.25	63	54	47	60	52	45	55	48	43	51	45	40	34	
1.5	69	60	53	66	58	51	60	53	48	55	49	45	39	
2	77	69	62	74	66	60	67	61	56	62	57	52	45	
2.5	83	75	69	79	72	66	72	67	62	66	62	58	50	
3	87	80	74	83	77	71	76	71	66	69	65	62	54	
4	92	86	81	88	83	78	81	76	72	74	70	67	58	
5	96	91	86	92	87	83	84	80	77	76	73	71	62	

A-A'

B-B'

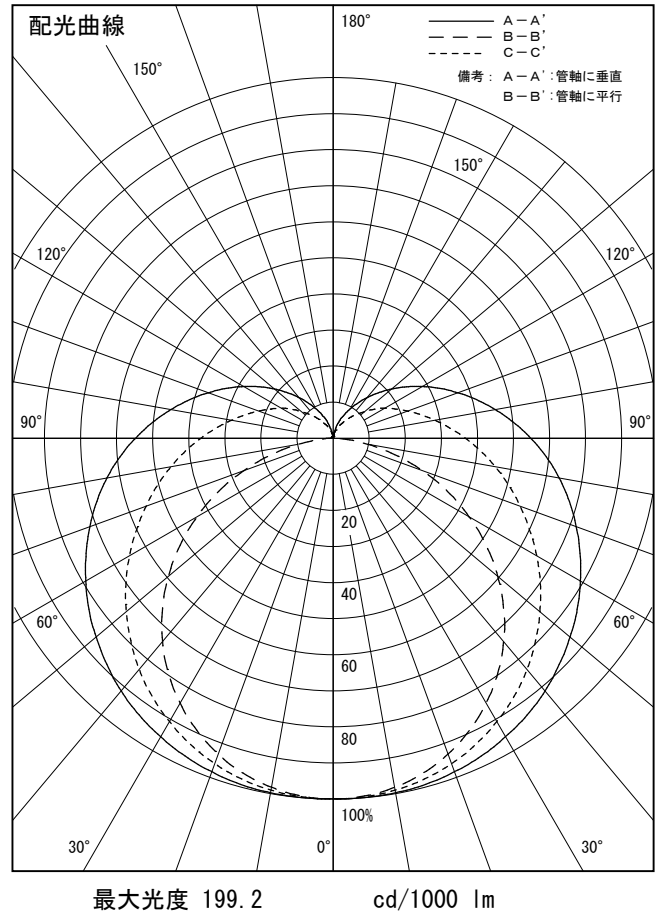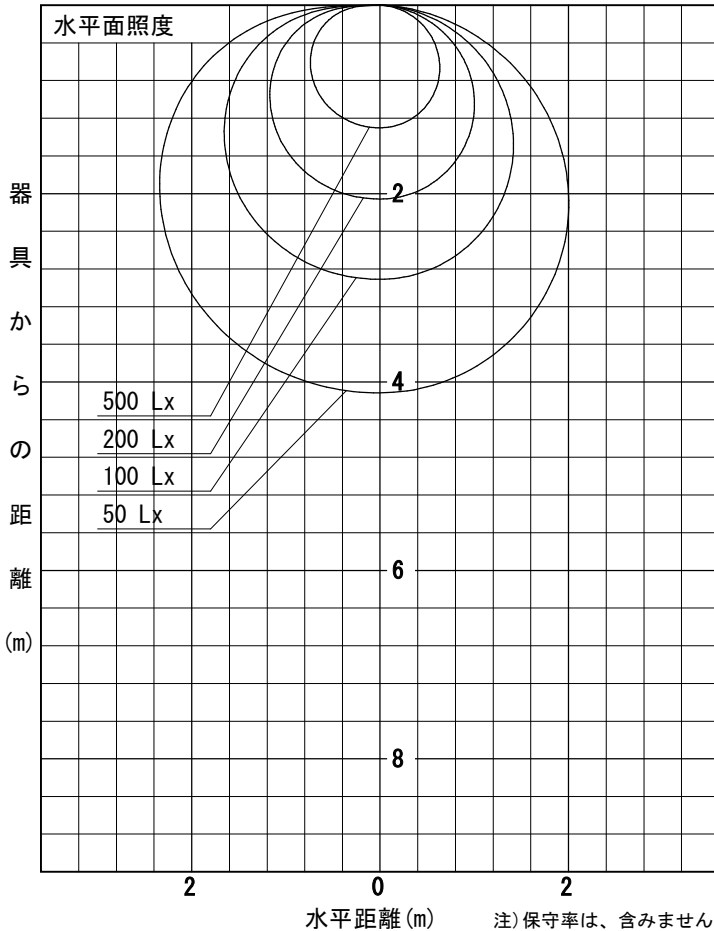

注)保守率は、含みません。