


姿図

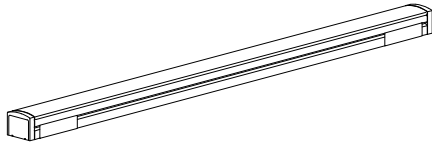



品番	DSY-4050ATG
光源	LED 12.6W 3500K
定格光束	1410 lm
1/2照度角	A-A' 66° B-B' 64°
ビーム角	A-A' 110° B-B' 104°

器具効率	100.0 %
上方光束	4.3 %
下方光束	95.7 %
器具間隔 最大限 (取付高さH)	A 1.29 H
	B 1.26 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井				70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床				20			20			20			0
室指数	照 明 率 (× 0.01)													
0.6	47	38	33	46	38	32	44	37	32	43	36	32	29	
0.8	56	48	41	55	47	41	53	46	40	51	45	40	37	
1	64	56	49	63	55	49	61	53	48	58	52	47	44	
1.25	72	64	57	71	63	57	68	61	55	65	59	54	51	
1.5	78	70	64	76	69	63	73	66	61	70	64	60	56	
2	87	79	73	84	78	72	81	75	70	77	72	68	64	
2.5	92	86	80	90	84	79	86	81	77	82	78	74	70	
3	96	90	86	94	89	84	89	85	81	85	82	79	74	
4	101	96	92	99	94	90	94	90	87	89	87	84	79	
5	104	100	97	102	98	95	97	94	91	92	90	87	82	

A-A'

B-B'

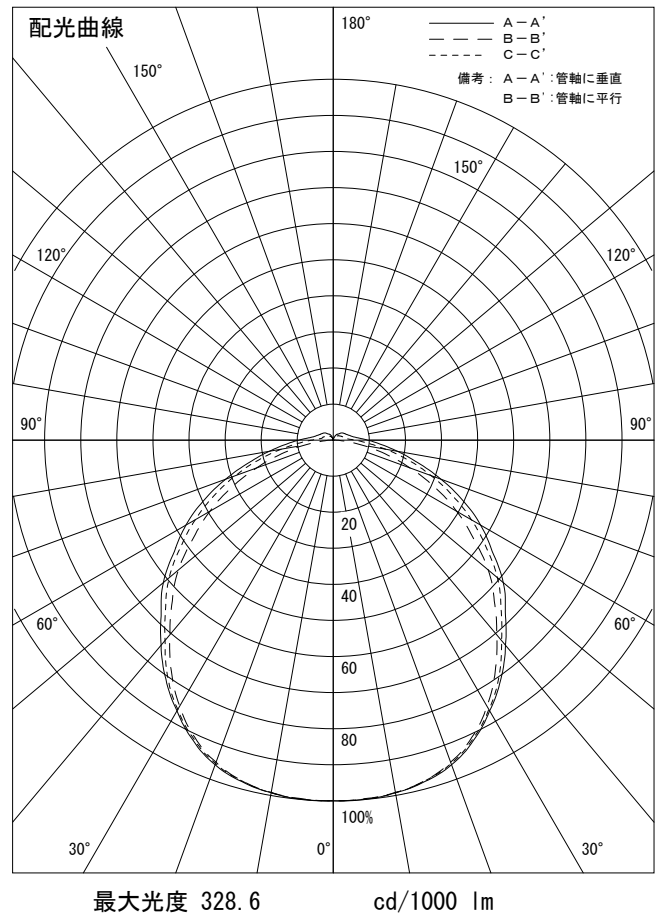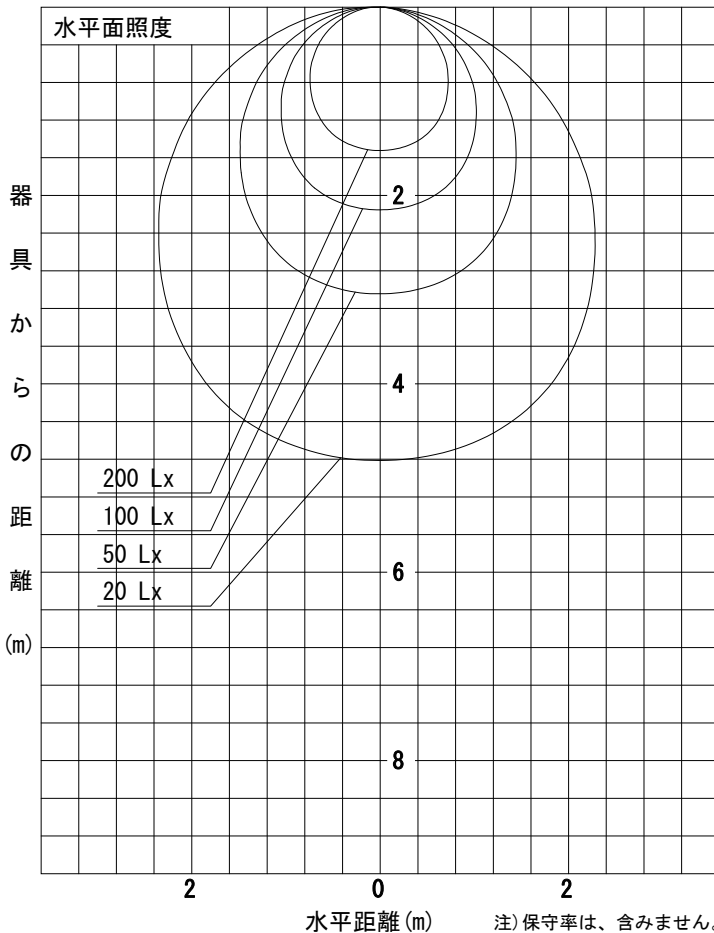

注) 保守率は、含みません。