


姿図

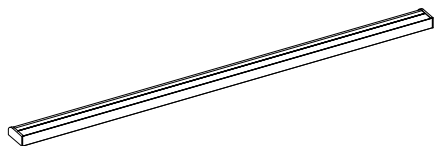

品 番	DSJ-5262FWG_5000K
光 源	LED 15W 5000K-3500K-2700K
定格光束	1700 lm
1/2照度角	(A34° A' 31°) B-B' 63°
ビーム角	(A66° A' 48°) B-B' 104°

器具効率	100.0 %
上方光束	4.2 %
下方光束	95.8 %
器具間隔 最大限 (取付高さH)	A *** H B 1.23 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		46	37	32	45	37	31	43	36	31	42	35	30	28
0.8		55	47	40	54	46	40	52	45	39	50	44	39	36
1		63	55	48	62	54	48	59	52	47	57	51	46	43
1.25		71	62	56	69	61	55	66	60	54	64	58	53	50
1.5		77	69	62	75	67	61	72	65	60	69	63	59	55
2		85	78	72	83	77	71	79	74	69	76	71	67	63
2.5		91	84	79	89	83	78	85	80	75	81	77	73	68
3		95	89	84	93	87	83	88	84	80	84	81	77	72
4		100	95	91	98	93	89	93	89	86	88	85	83	77
5		103	99	95	101	97	93	96	92	90	91	89	86	81

