


姿図

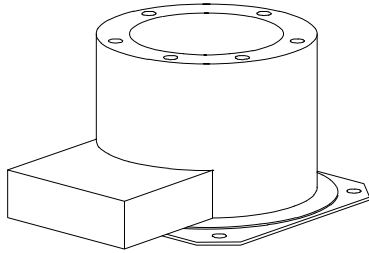

品番	LLG-7133NUW
光源	LED 9.5W 4000K
定格光束	870 lm
1/2照度角	上部配光 27°
ビーム角	上部配光 27°

器具効率	100.0 %
上方光束	100.0 %
下方光束	0.0 %
器具間隔 最大限 (取付高さH)	A 0.48 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			50			30			0		
	80	70	50	30	10	50	30	10	50	30	10	50	30	10	0
床	20			20			20			20			0		
室指数	照 明 率 (× 0.01)														
0.6	34	27	22	30	24	20	20	17	14	12	10	8	0		
0.8	43	35	30	37	31	26	25	22	19	15	13	11	0		
1	50	42	37	43	36	32	29	25	23	17	15	13	0		
1.25	56	49	43	48	42	38	33	29	26	19	17	16	0		
1.5	61	54	49	52	47	42	36	32	30	21	19	17	0		
2	68	62	57	58	53	49	40	37	34	23	21	20	0		
2.5	73	67	62	62	58	54	43	40	37	25	23	22	0		
3	76	71	66	65	61	57	44	42	40	26	24	23	0		
4	80	76	72	69	65	62	47	45	43	27	26	25	0		
5	83	80	76	71	68	66	49	47	45	28	27	26	0		

