


姿図

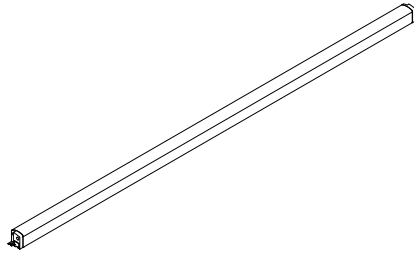



品番	DSY-5466WW
光源	LED 12.6W 5000K
定格光束	1550 lm
1/2照度角	A-A' 66° B-B' 64°
ビーム角	A-A' 110° B-B' 104°

器具効率	100.0 %
上方光束	4.3 %
下方光束	95.8 %
器具間隔 最大限 (取付高さH)	A 1.29 H
	B 1.26 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			床			照明率 (×0.01)			
	80	70	50	80	70	50	80	70	50	80	70	50	
室指数	46	38	32	45	38	32	44	37	32	42	36	31	29
0.6	56	47	41	55	47	41	53	46	40	51	45	40	37
0.8	64	56	49	63	55	49	60	53	48	58	52	47	44
1	72	63	57	70	62	56	67	61	55	64	59	54	51
1.25	78	70	63	76	68	63	73	66	61	69	64	60	56
1.5	86	79	73	84	78	72	80	75	70	77	72	68	64
2	92	85	80	90	84	79	85	80	76	81	77	74	69
2.5	96	90	85	93	88	84	89	85	81	85	81	78	73
3	101	96	92	98	94	90	93	90	87	89	86	84	78
4	104	100	96	101	98	94	96	93	90	92	89	87	81
5													

A-A'

B-B'

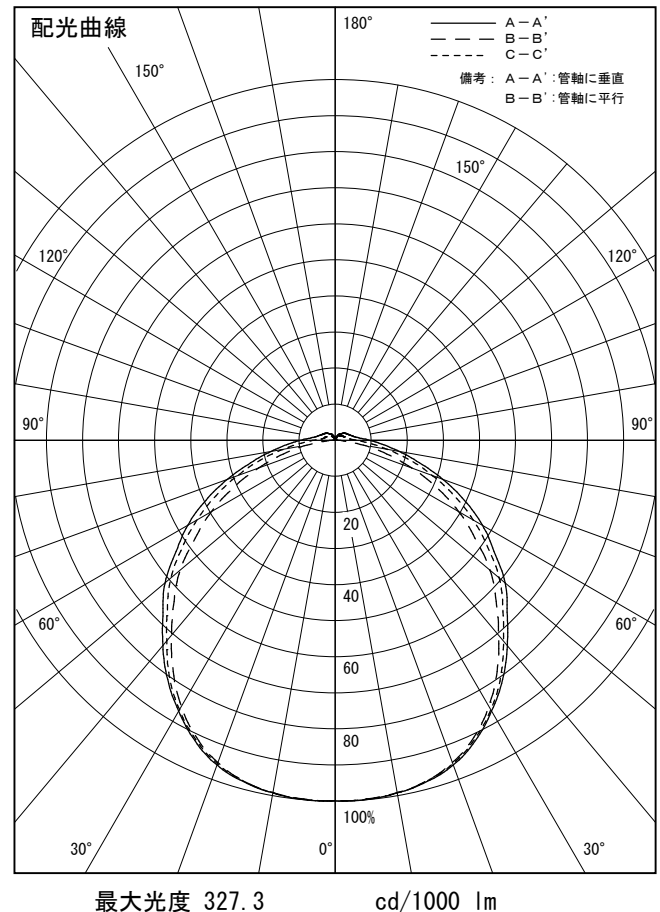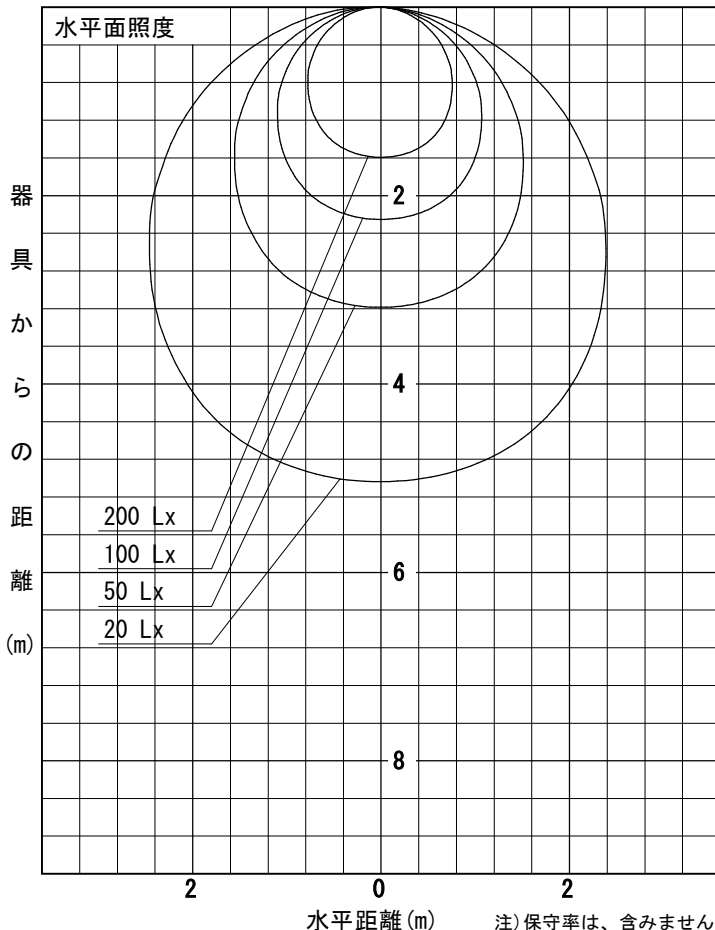

注)保守率は、含みません。